

55

Years of Excellence

Edition 2 | 2025-2026



INDO GROUP



Pune, MH, India _____



Indo Group

Pune
(Head Office)

Address: MIDC Rd, T Block, MIDC,
Bhosari, Pimpri-Chinchwad,
Maharashtra 411026

JRCJ+F8 Pimpri-Chinchwad, Maharashtra

General

P 020 2712 3003

E info@indogroup.asia

Sales

P 020 2712 3003

E sales@indogroup.asia

Accounts

P 020 2712 3003

E finance@indogroup.asia

Service

P 020 2712 3003

E technical@indogroup.asia

Built for Performance. Backed by Trust.

Indo Group is the official distributor of HD Hyundai Infracore in India, delivering high-performance construction and earthmoving equipment built for durability, efficiency, and precision. From powerful excavators to smart control systems, we bring world-class Korean engineering to Indian infrastructure.


With strong after-sales support and technical expertise, Indo Group ensures reliable solutions for every terrain.

Marine Engine

Marine Propulsion


L136

Cylinder L6
 Displacement 8.1 ℓ
 Power Range 118 kW
 Speed Range 2,200 rpm
 Aspiration Natural Aspirated
 Bore x Stroke 111 x 139 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 118(160) @ 2,200
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,266 x 875 x 937 mm
 Dry Weight 743 kg
 Emissions IMO Tier I



L136T

Cylinder L6
 Displacement 8.1 ℓ
 Power Range 147 kW
 Speed Range 2,200 rpm
 Aspiration Turbo Charger
 Bore x Stroke 111 x 139 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 147(200) @ 2,200
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,351 x 893 x 937 mm
 Dry Weight 748 kg
 Emissions IMO Tier I

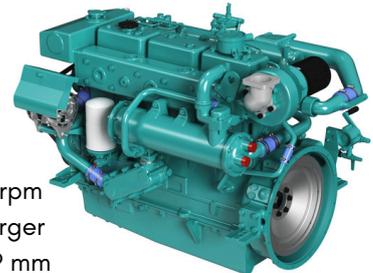

L136TI

Cylinder L6
 Displacement 8.1 ℓ
 Power Range 169 kW
 Speed Range 2,200 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 111 x 139 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 169(230) @ 2,200
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,364 x 911 x 937 mm
 Dry Weight 773 kg
 Emissions IMO Tier II



L086TI

Cylinder L6
 Displacement 8.1 ℓ
 Power Range 210-265 kW
 Speed Range 2,100-2,500 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 111 x 139 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 210(285) @ 2,100
 kW(PS) @ rpm Medium Duty 232(315) @ 2,300
 kW(PS) @ rpm Light Duty 265(360) @ 2,500
 Dimension (L x W x H) 1,364 x 919 x 965 mm
 Dry Weight 790 kg
 Emissions IMO Tier II



4L066C




Cylinder L6
 Displacement 5.9 ℓ
 Power Range 184-221 kW
 Speed Range 1,800-2,300 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 100 x 125 mm
 kW(PS) @ rpm Continuous Duty 184(250) @ 1,800
 kW(PS) @ rpm Heavy Duty 210(285) @ 2,100
 kW(PS) @ rpm Medium Duty 221(300) @ 2,300
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,408 x 837 x 1,155 mm
 Dry Weight 753 kg
 Emissions IMO Tier II/III, EPA Tier 3

MD196T



Cylinder L6
 Displacement 11.1 ℓ
 Power Range 206 kW
 Speed Range 2,000 rpm
 Aspiration Turbo Charger
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 206(280) @ 2,000
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,397 x 931 x 1,077 mm
 Dry Weight 975 kg
 Emissions IMO Tier I

MD196TI




Cylinder L6
 Displacement 11.1 ℓ
 Power Range 235 kW
 Speed Range 2,000 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 235(320) @ 2,000
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,397 x 933 x 1,077 mm
 Dry Weight 1,009 kg
 Emissions IMO Tier II

4L086C



Cylinder L6
 Displacement 7.6 ℓ
 Power Range 235-279 kW
 Speed Range 1,800-2,100 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 108 x 139 mm
 kW(PS) @ rpm Continuous Duty 235(320) @ 1,800
 kW(PS) @ rpm Heavy Duty 265(360) @ 2,000
 kW(PS) @ rpm Medium Duty 279(380) @ 2,100
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,394 x 882 x 1,220 mm
 Dry Weight 920 kg
 Emissions IMO Tier II/III, EPA Tier 3

L126TI



Cylinder L6
 Displacement 11.1 ℓ
 Power Range 265-294 kW
 Speed Range 2,000-2,100 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 265(360) @ 2,000
 kW(PS) @ rpm Medium Duty 294(400) @ 2,100
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,414 x 933 x 1,077 mm
 Dry Weight 1,060 kg
 Emissions IMO Tier II

4L126TI



Cylinder L6
 Displacement 11.1 ℓ
 Power Range 294-401 kW
 Speed Range 1,800-2,200 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm Continuous Duty 294(400) @ 1,800
 kW(PS) @ rpm Heavy Duty 331(450) @ 2,000
 kW(PS) @ rpm Medium Duty 364(495) @ 2,100
 kW(PS) @ rpm Light Duty 401(545) @ 2,200
 Dimension (L x W x H) 1,131 x 904 x 1,153 mm
 Dry Weight 1,136 kg
 Emissions IMO Tier II

4L126C

Cylinder L6
 Displacement 11.1 ℓ
 Power Range 331-405 kW
 Speed Range 1,800-2,100 rpm
 Aspiration 과급기 & 인터쿨러
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm Continuous Duty 331(450) @ 1,800
 kW(PS) @ rpm Heavy Duty 405(550) @ 2,100
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,607 x 912 x 1,287 mm
 Dry Weight 1,182 kg
 Emissions IMO Tier II/III, EPA Tier 3



V158TI

Cylinder V8
 Displacement 14.6 ℓ
 Power Range 353-500 kW
 Speed Range 1,800-2,300 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 142 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 353(480) @ 1,800
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty 500(680) @ 2,300
 Dimension (L x W x H) 1,629 x 1,224 x 1,122 mm
 Dry Weight 1,350 kg
 Emissions IMO Tier II



4V158TI

Cylinder V8
 Displacement 14.6 ℓ
 Power Range 390 kW
 Speed Range 1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 142 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 390(530) @ 1,800
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty -
 Dimension (L x W x H) 1,567 x 1,235 x 1,110 mm
 Dry Weight 1,540 kg
 Emissions IMO Tier II




4V158C

Cylinder V8
 Displacement 15.1 ℓ
 Power Range 449-640 kW
 Speed Range 1,800-2,300 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 147 mm
 kW(PS) @ rpm Continuous Duty 449(610) @ 1,800
 kW(PS) @ rpm Heavy Duty 463(630) @ 1,800
 kW(PS) @ rpm Medium Duty 550(748) @ 2,100
 kW(PS) @ rpm Light Duty 640(870) @ 2,300
 Dimension (L x W x H) 1,564 x 1,310 x 1,380 mm
 Dry Weight 1,555 kg
 Emissions IMO Tier II/III, EPA Tier 3




V222TI

Cylinder V12
 Displacement 21.9 ℓ
 Power Range 530-736 kW
 Speed Range 1,800-2,300 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 142 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 530(720) @ 1,800
 kW(PS) @ rpm Medium Duty -
 kW(PS) @ rpm Light Duty 736(1,000) @ 2,300
 Dimension (L x W x H) 1,945 x 1,231 x 1,196 mm
 Dry Weight 1,750 kg
 Emissions IMO Tier II



4V222TI

Cylinder V12
 Displacement 21.9 ℓ
 Power Range 588-883 kW
 Speed Range 1,800-2,300 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 142 mm
 kW(PS) @ rpm Continuous Duty -
 kW(PS) @ rpm Heavy Duty 588(800) @ 1,800
 kW(PS) @ rpm Medium Duty 647(880) @ 2,100
 kW(PS) @ rpm Light Duty 883(1,200) @ 2,300
 Dimension (L x W x H) 1,883 x 1,241 x 1,235 mm
 Dry Weight 1,920 kg
 Emissions IMO Tier II

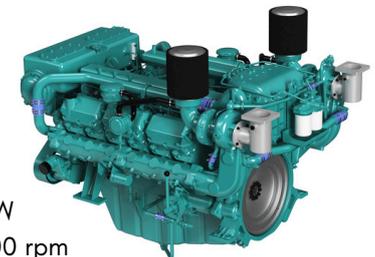

4V222C



Cylinder V12
 Displacement 21.9 ℓ
 Power Range 596-908 kW
 Speed Range 1,800-2,300 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 142 mm
 kW(PS) @ rpm Continuous Duty 596(810) @ 1,800
 kW(PS) @ rpm Heavy Duty 736(1,000) @ 1,800
 kW(PS) @ rpm Medium Duty 809(1,100) @ 2,100
 kW(PS) @ rpm Light Duty 908(1,235) @ 2,300
 Dimension (L x W x H) 1,914 x 1,323 x 1,346 mm
 Dry Weight 2,020 kg
 Emissions IMO Tier II/III, EPA Tier 3

Marine Engine


Marine Auxiliary

AD136



Cylinder L6
 Displacement 8.1 ℓ
 Power Range 77-93 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Natural Aspirated
 Bore x Stroke 111 x 139 mm
 kW(PS) @ rpm 50Hz 77(105) @ 1,500
 kW(PS) @ rpm 60Hz 93(126) @ 1,800
 Dimension (L x W x H) 1,182 x 770 x 925 mm
 Dry Weight 735 kg
 Emissions IMO Tier I

AD136T

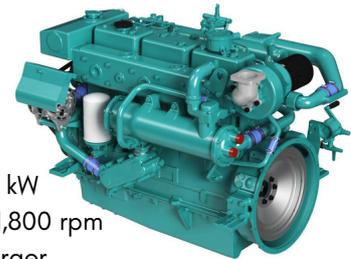

Cylinder L6
 Displacement 8.1 ℓ
 Power Range 107-125 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger
 Bore x Stroke 111 x 139 mm
 kW(PS) @ rpm 50Hz 107(145) @ 1,500
 kW(PS) @ rpm 60Hz 125(170) @ 1,800
 Dimension (L x W x H) 1,182 x 770 x 925 mm
 Dry Weight 748 kg
 Emissions IMO Tier I

AD136TI



Cylinder L6
 Displacement 8.1 ℓ
 Power Range 115-138 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 111 x 139 mm
 kW(PS) @ rpm 50Hz 115(157) @ 1,500
 kW(PS) @ rpm 60Hz 138(188) @ 1,800
 Dimension (L x W x H) 1,182 x 825 x 925 mm
 Dry Weight 773 kg
 Emissions IMO Tier II

AD086TI



Cylinder L6
 Displacement 8.1 ℓ
 Power Range 151-186 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 111 x 139 mm
 kW(PS) @ rpm 50Hz 151(205) @ 1,500
 kW(PS) @ rpm 60Hz 186(253) @ 1,800
 Dimension (L x W x H) 1,182 x 825 x 962 mm
 Dry Weight 790 kg
 Emissions IMO Tier II

4AD066C



Cylinder L6
 Displacement 5.9 ℓ
 Power Range 154-184 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 100 x 125 mm
 kW(PS) @ rpm 50Hz 154(209) @ 1,500
 kW(PS) @ rpm 60Hz 184(250) @ 1,800
 Dimension (L x W x H) 1,408 x 837 x 1,155 mm
 Dry Weight 753 kg
 Emissions IMO Tier II/III, EPA Tier 3

AD196TI




Cylinder L6
 Displacement 11.1 ℓ
 Power Range 173-199 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm 50Hz 173(235) @ 1,500
 kW(PS) @ rpm 60Hz 199(270) @ 1,800
 Dimension (L x W x H) 1,193 x 854 x 1,072 mm
 Dry Weight 1,009 kg
 Emissions IMO Tier II

4AD086C



Cylinder L6
 Displacement 7.6 ℓ
 Power Range 199-235 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 108 x 139 mm
 kW(PS) @ rpm 50Hz 199(271) @ 1,500
 kW(PS) @ rpm 60Hz 235(320) @ 1,800
 Dimension (L x W x H) 1,394 x 882 x 1,220 mm
 Dry Weight 920 kg
 Emissions IMO Tier II/III, EPA Tier 3

AD126TI

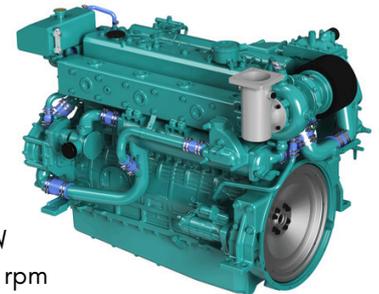

Cylinder L6
 Displacement 11.1 ℓ
 Power Range 206-247 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm 50Hz 206(280) @ 1,500
 kW(PS) @ rpm 60Hz 247(336) @ 1,800
 Dimension (L x W x H) 1,193 x 854 x 1,072 mm
 Dry Weight 1,060 kg
 Emissions IMO Tier II

4AD126TI



Cylinder L6
 Displacement 11.1 ℓ
 Power Range 257-302 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm 50Hz 257(350) @ 1,500
 kW(PS) @ rpm 60Hz 302(410) @ 1,800
 Dimension (L x W x H) 1,131 x 904 x 1,153 mm
 Dry Weight 1,136 kg
 Emissions IMO Tier II

4AD126C



Cylinder L6
 Displacement 11.1 ℓ
 Power Range 287-335 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 123 x 155 mm
 kW(PS) @ rpm 50Hz 287(390) @ 1,500
 kW(PS) @ rpm 60Hz 335(455) @ 1,800
 Dimension (L x W x H) 1,607 x 912 x 1,287 mm
 Dry Weight 1,182 kg
 Emissions IMO Tier II/III, EPA Tier 3

AD158TI

Cylinder V8
 Displacement 14.6 ℓ
 Power Range 302-353 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 142 mm
 kW(PS) @ rpm 50Hz 302(410) @ 1,500
 kW(PS) @ rpm 60Hz 353(480) @ 1,800
 Dimension (L x W x H) 1,629 x 1,224 x 1,122 mm
 Dry Weight 1,295 kg
 Emissions IMO Tier II




4AD158C

Cylinder V8
 Displacement 15.1 ℓ
 Power Range 386-463 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 147 mm
 kW(PS) @ rpm 50Hz 386(525) @ 1,500
 kW(PS) @ rpm 60Hz 463(630) @ 1,800
 Dimension (L x W x H) 1,564 x 1,310 x 1,380 mm
 Dry Weight 1,555 kg
 Emissions IMO Tier II/III, EPA Tier 3




AD222TI

Cylinder V12
 Displacement 21.9 ℓ
 Power Range 446-530 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 142 mm
 kW(PS) @ rpm 50Hz 446(606) @ 1,500
 kW(PS) @ rpm 60Hz 530(720) @ 1,800
 Dimension (L x W x H) 1,945 x 1,231 x 1,196 mm
 Dry Weight 1,735 kg
 Emissions IMO Tier II



4AD222C

Cylinder V12
 Displacement 21.9 ℓ
 Power Range 553-736 kW
 Speed Range 1,500-1,800 rpm
 Aspiration Turbo Charger & Inter Cooler
 Bore x Stroke 128 x 142 mm
 kW(PS) @ rpm 50Hz 553(752) @ 1,500
 kW(PS) @ rpm 60Hz 736(1,000) @ 1,800
 Dimension (L x W x H) 1,914 x 1,323 x 1,346 mm
 Dry Weight 2,020 kg
 Emissions IMO Tier II/III, EPA Tier 3

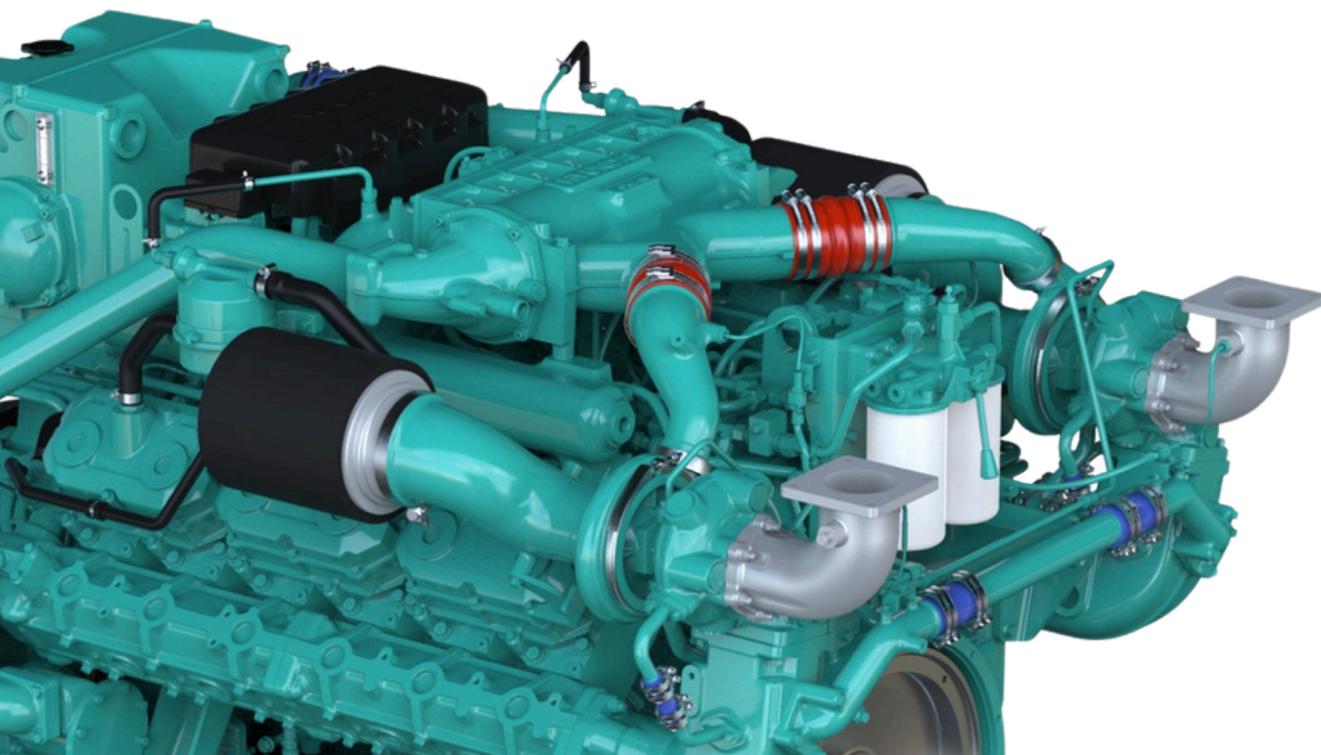

Indo Group

Pune

(Head Office)

Address: MIDC Rd, T Block, MIDC,
Bhosari, Pimpri-Chinchwad,
Maharashtra 411026

Web: www.indogroup.asia

E-mail: info@indogroup.asia

Phone: 020 2712 3003

JRCJ+F8 Pimpri-Chinchwad, Maharashtra



INDO GROUP