







NISYA
Live The Miracle

POFILE LIGHTS CATALOGUE 2024



PROFILE



Nisya Electricals India Pvt. Ltd. is one of the Leading LED Lighting Solutions provider, with one of the best talent pools of LED Lighting Industry experts and having a vast experience of around 30 plus years. Our Factory of 25K square feet is Located in Mumbai – Vasai, where we have our own Manufacturing Unit, Quality Facility, R&D Centre & Warehousing etc. Our Company is engaged in designing and manufacturing energy efficient and durable LED luminaires for Homes, Modern work spaces, Retail spaces, Manufacturing facilities, Roadways, Railways, Airports and City beautification projects. Our company forte is into Linea lighting & we also have our own range of Indoor & Outdoor conventional LED lighting products as well as architectural products. We have around 500 retail stores lighting experience of retrofitting as well as developing new Stores, Retrofitting of Warehouses, Airports, Food Courts, Pharma Industries, to name a few.

Our Lighting Solutions :

Using our extensive expertise, we are able to provide advice and guidance in a project that, We can also offers enhanced design scope & Customized design. We develop high-quality Products semiconductor-based & COB based . We explore digital innovations in order to be able to provide smart connected lighting solutions. Our products today already feature technologies of tomorrow.

Factory View :

Our Infrastructure is spread over an area of 25000 square feet and is well equipped with a manufacturing unit, in-house design unit as well as advance research and development wing and Quality Dept..(In Set up Mode) Our diligent and proficient workforce is capable of understanding client's requirement which allows them to cater to the same in best possible manner.

Manufacturing Facilites :

LLC has total 2 production Unit located in house Area around 1200 Sq. feet each with Fully AC and Dust Proof Environment . (In Set up mode)

Product Details Which Manufacture & Assemble :

Led Down Light / Track Light / Zoom Light

Surface / Suspended Cylindrical Downlight / Architectural Downlight

Linear Aluminum Profile (Formation & Non Formation Design)


Led 2x2 Panels Edge-lit & Back-lit

Led Decorative & Others

Magnetic Fixtures of 15mm, 25mm & 35mm

Optional Chip Brand

LLC choose brand original light source, make sure that the color tolerance < 3 color performance, pure light color, high color rendering, a uniform light is downy, completely simulate natural light. In the process of production strictly detection, quality control, Ensure that each light source are excellent, consistent, sustained and stable color expressive force.

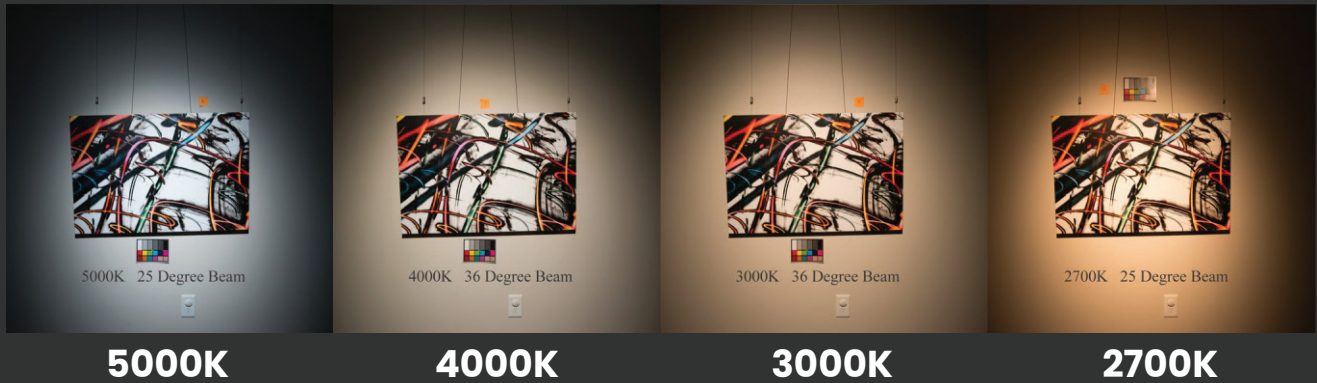

Color Temperature

Variety of light color option, meet different lighting environment needs.

Warm White / 2700K / 3000K)

Suitable for low intensity of illumination requirements of household, hotels, clubs, restaurants, exclusive stores etc.

Neutral white (4000K)

Suitable for higher demand illumination chain stores, commercial complexes, office buildings and other places

Cool white (5000K to 6000K)

Suitable for higher demand illumination schools, hospitals, jewelry stores, jade shops, roads and other places

INDEX

SHIMMER SERIES



SMR-0709



SMR-0709



SMR-2208



SMR-1808



SMR-1616



SMR-1818



SMR-1714



SMR-2214



SMR-W-LINEAR



SMR-UP DOWN

CIVIS SERIES



SVK-2825



SVK-3525



SVK-2575

BLAZE SERIES



BLZ-3530



BLZ-4530



BLZ-3570



BLZ-3580

ELEGANCE SERIES



ELG-5235



ELG-6535



ELG-5275



ELG-5275



ELG-5275



ELG-5686

GLEAM SERIES



GLM-7535



GLM-7575



GLM-9035

DAZZLE SERIES



DZL-3530



DZL-4530



DZL-3580

WELKIN SERIES



WLK-EDGE LIT
PANEL



WLK-BACK LIT
PANEL

DANISH SERIES



DNS-SP



DNS-RC

NOVA SERIES



NOV-SP



NOV-SF



NOV-RC

SONSY SERIES



SONY-RC-5070



SONY-RC-6535



SONY-RC-7550

CUSTOMISED LINEARS




TWINKLE



GLITTER



GLANCE



GLIMPSE






SHEEN









SHIMMER SERIES

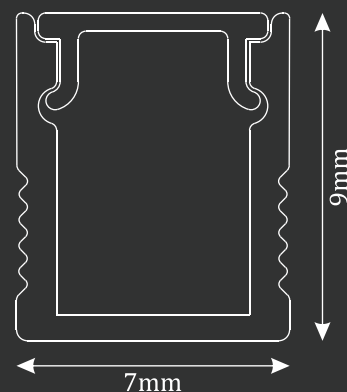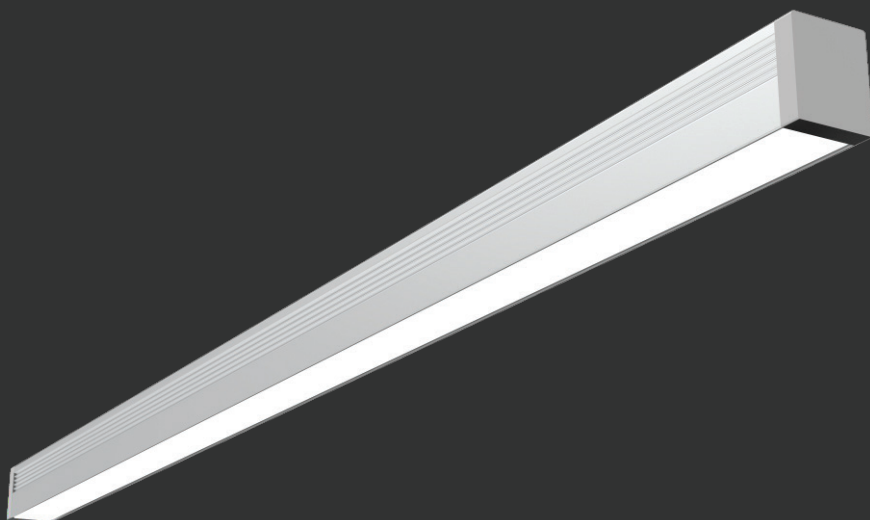


Body Color Available



White



Anodized



Black

CCT



3000K



4000K





5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 10w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 7mm • Width : 7mm • Height : 9mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

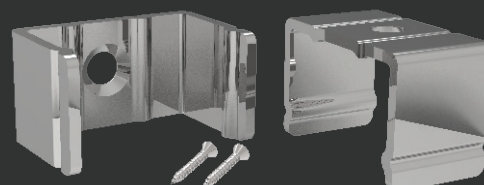


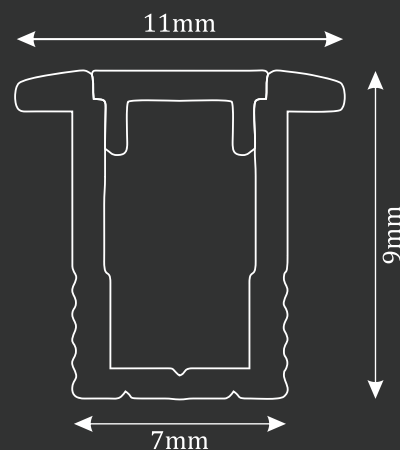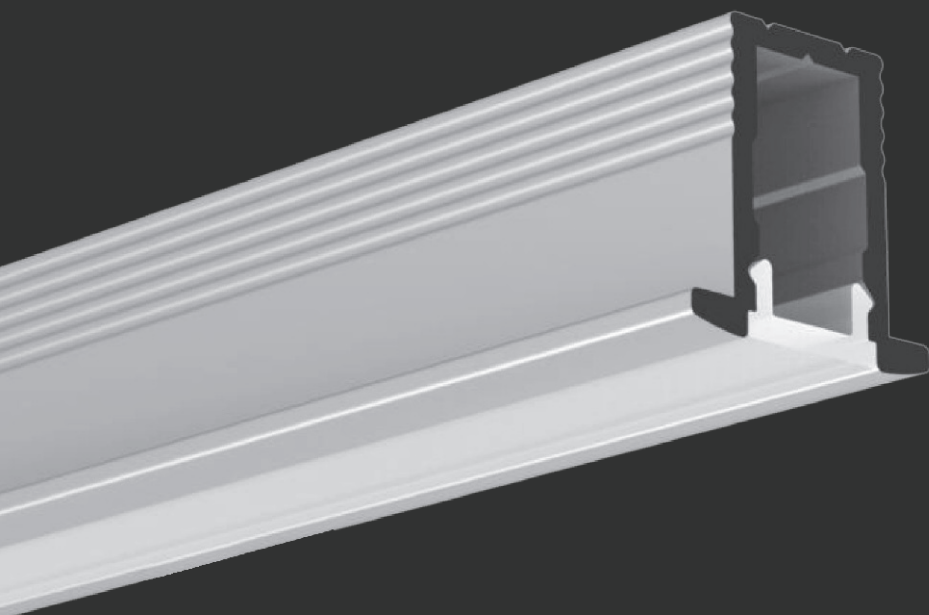


Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 10w/meter
Mounting Type	: Recessed
Dimensions	: • Cutout : 7mm • Width : 11mm • Height : 9mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamps




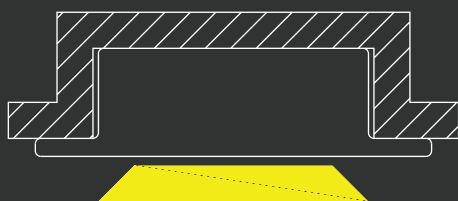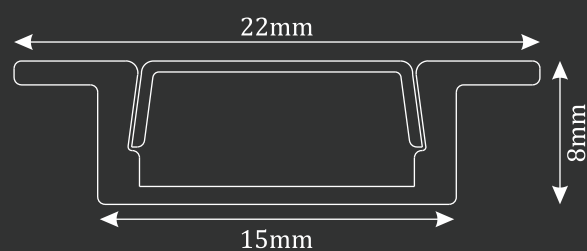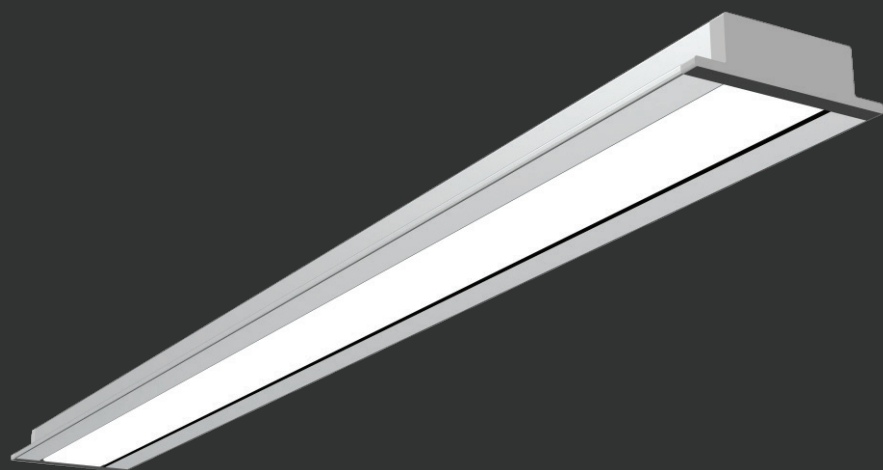


Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 10w/meter
Mounting Type	: Recessed
Dimensions	: • Cutout : 15mm • Width : 22mm • Height : 08mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp




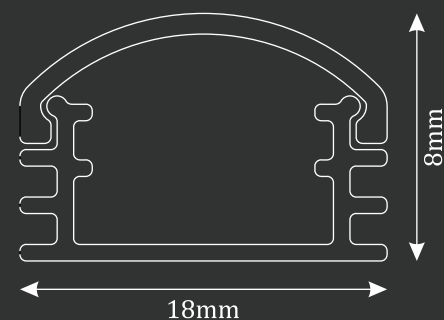


Body Color Available



White



Anodized



Black

CCT



3000K



4000K





5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 18mm • Width : 18mm • Height : 08mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

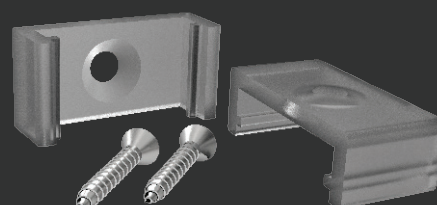


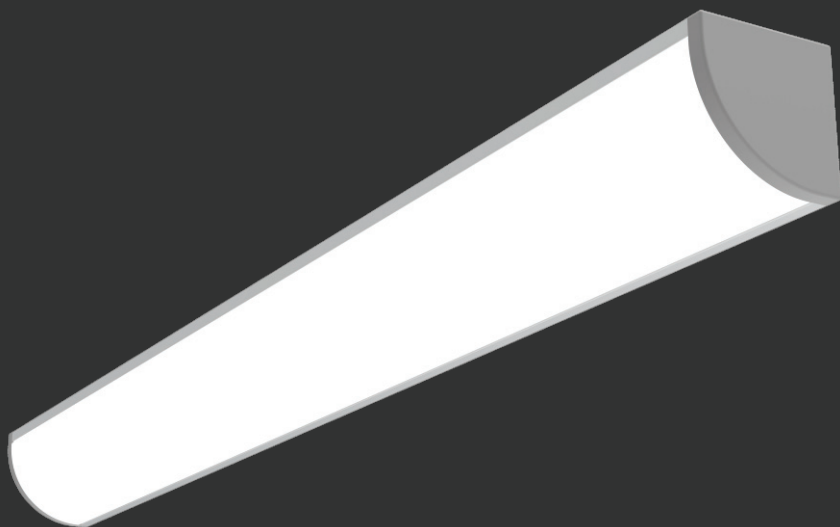

Body Color Available



White



Anodized



Black

CCT



3000K



4000K





5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Corner Surface
Dimensions	: • Cutout : 16mm • Width : 16mm • Height : 16mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

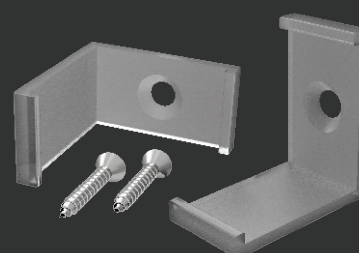


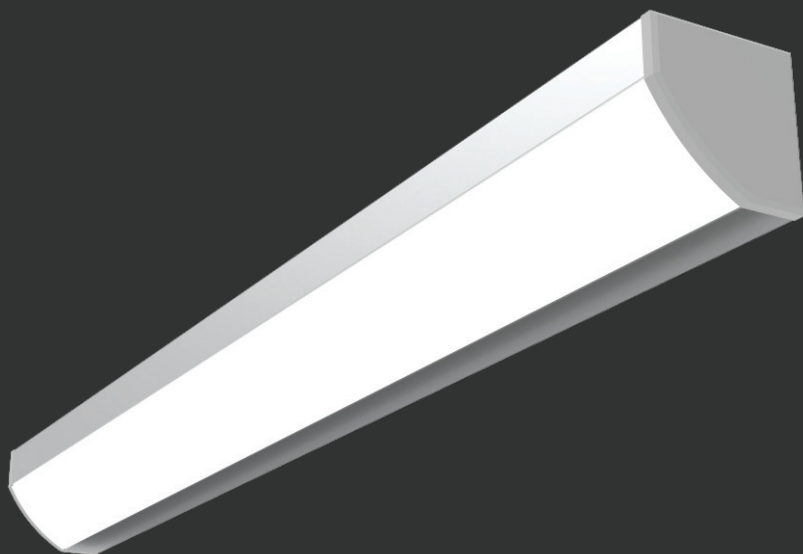


Body Color Available



White



Anodized



Black

CCT



3000K



4000K





5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Corner Surface
Dimensions	: • Cutout : 18mm • Width : 18mm • Height : 18mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

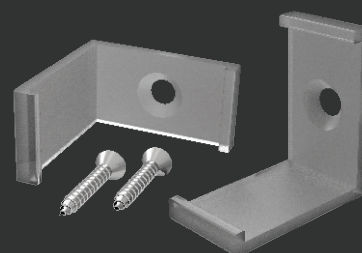


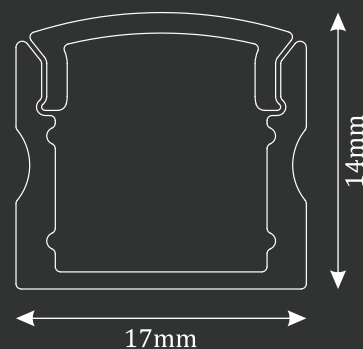


Body Color Available



White



Anodized



Black

CCT



3000K



4000K





5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 17mm • Width : 17mm • Height : 14mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

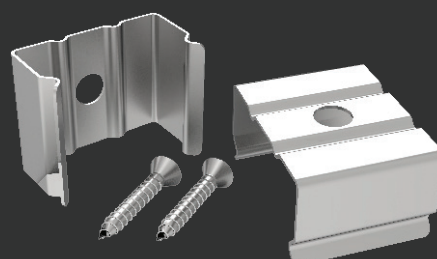


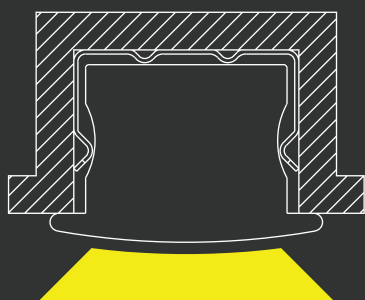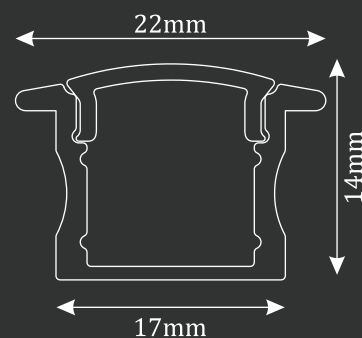


Body Color Available



White



Anodized



Black

CCT



3000K



4000K





5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Recessed & Concealed
Dimensions	: • Cutout : 17mm • Width : 22mm • Height : 14mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp

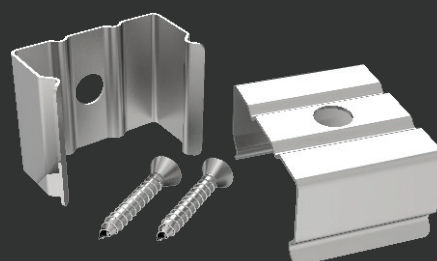


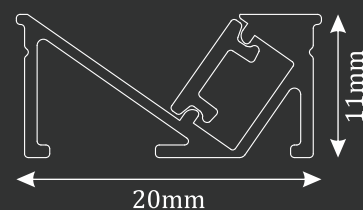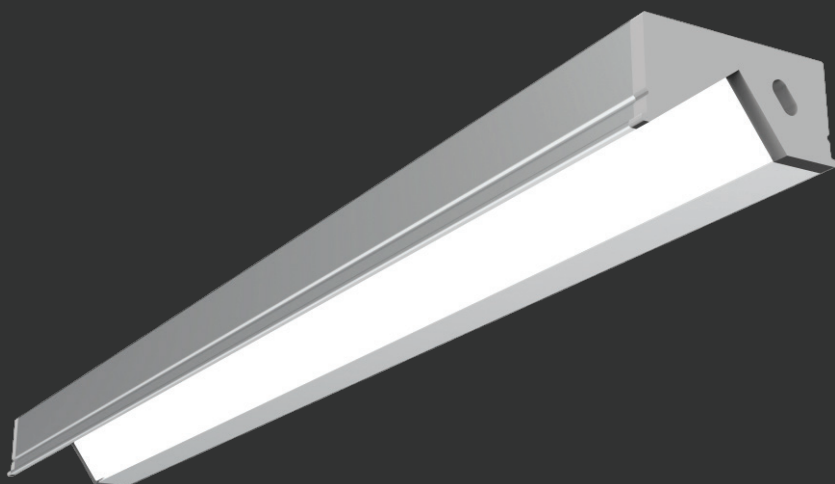


Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: LED Strip (5mm) 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 10w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 17mm • Width : 20mm • Height : 11mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamps




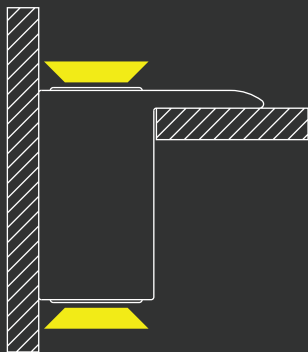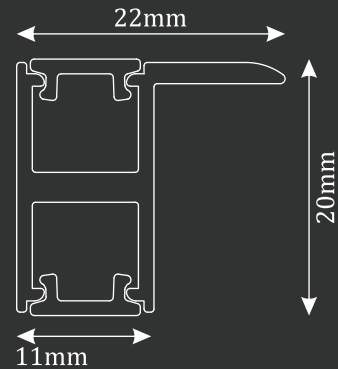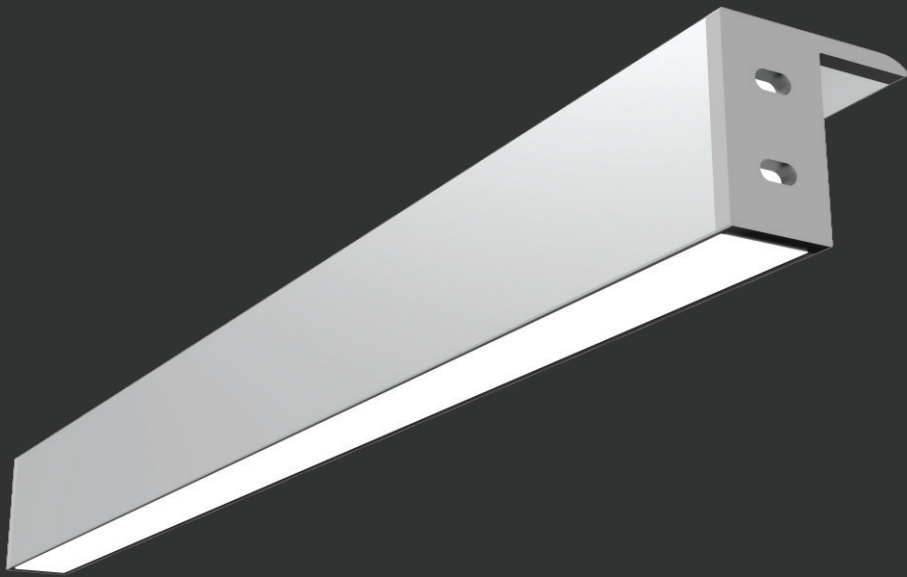


Body Color Available



White



Anodized



Black

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: Polycarbonate (PC)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Meanwell - 24V DC
Wattage	: 15w/meter
Mounting Type	: Surface
Dimensions	: • Cutout : 11mm • Width : 22mm • Height : 20mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver • Sensor


Accessories

Connectors & Mounting Clamp







SIVIS SERIES




Body Color Available



White



Grey



Black

CCT



3000K



4000K





5700K


Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Mounting Type	: Recessed & Concealed
Dimensions	: • Width : 28mm • Height : 25mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories Spring Clamp

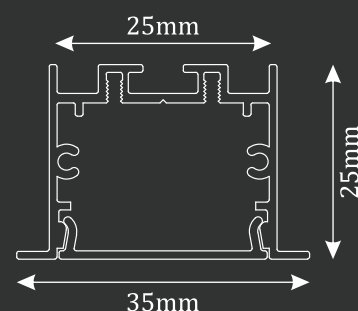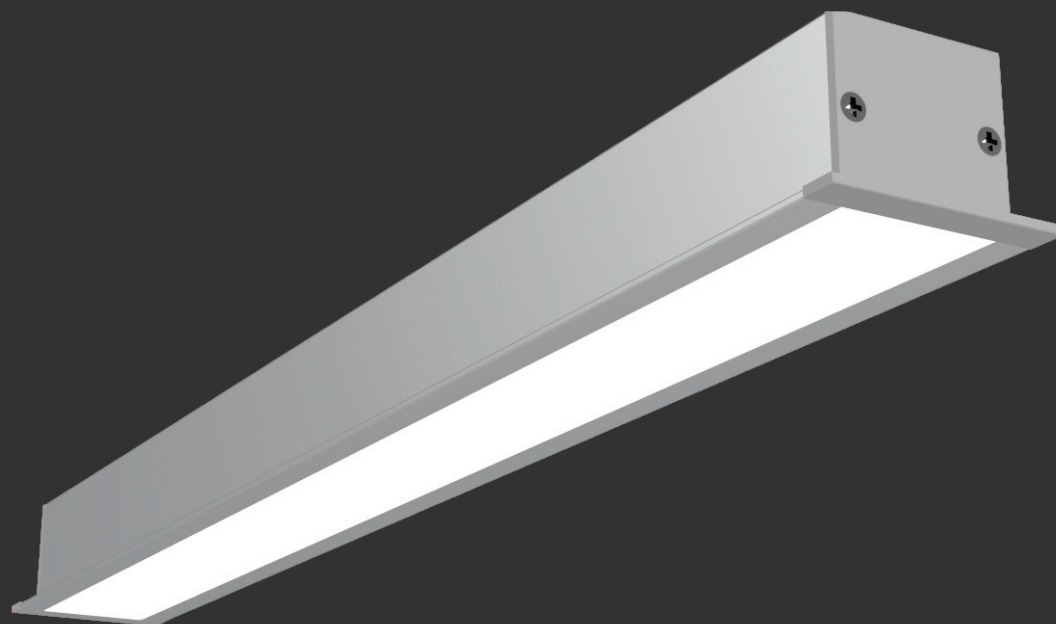


Body Color Available



White



Grey



Black

CCT



3000K



4000K




5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Mounting Type	: Recessed & Concealed
Dimensions	: • Cutout : 25mm • Width : 35mm • Height : 25mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories Spring Clamp




SVK-2575

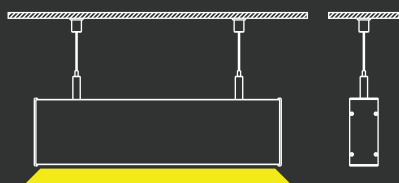


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: (Suspended and Suspended updown)
Dimensions	: • Width : 25mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories



Hanging






BLAZE SERIES


BLZ-3530

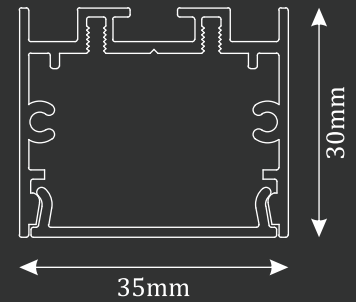


Body Color Available



White



Grey



Black

CCT



3000K



4000K




5700K


Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Surface
Dimensions	: • Cutout : 35mm • Width : 35mm • Height : 30mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


BLZ-4530

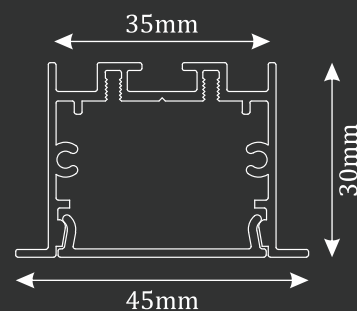

Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification



Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 35mm • Width : 45mm • Height : 30mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories


C-Clamp




BLZ-3570

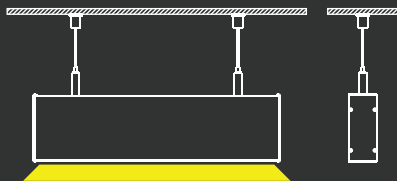

Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification



Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: (Suspended and Suspended updown)
Dimensions	: • Width : 35mm • Height : 70mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories


Hanging




BLZ-3580

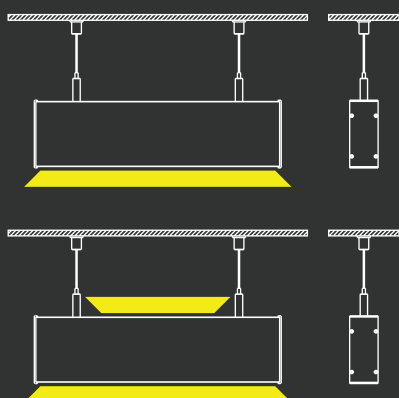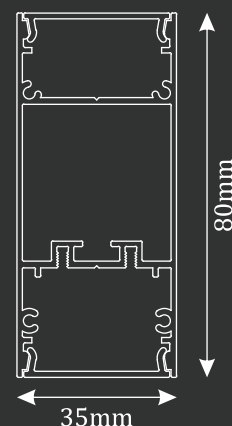


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: (Suspended and Suspended updown)
Dimensions	: • Width : 35mm • Height : 80mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

Hanging







ELEGANCE SERIES

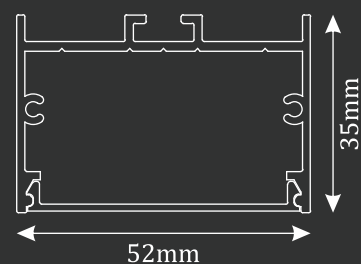


Body Color Available



White



Grey



Black

CCT



3000K






4000K




5700K

Technical Specification


Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Surface
Dimensions	: • Cutout : 52mm • Width : 52mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

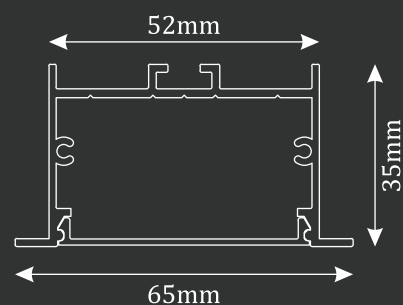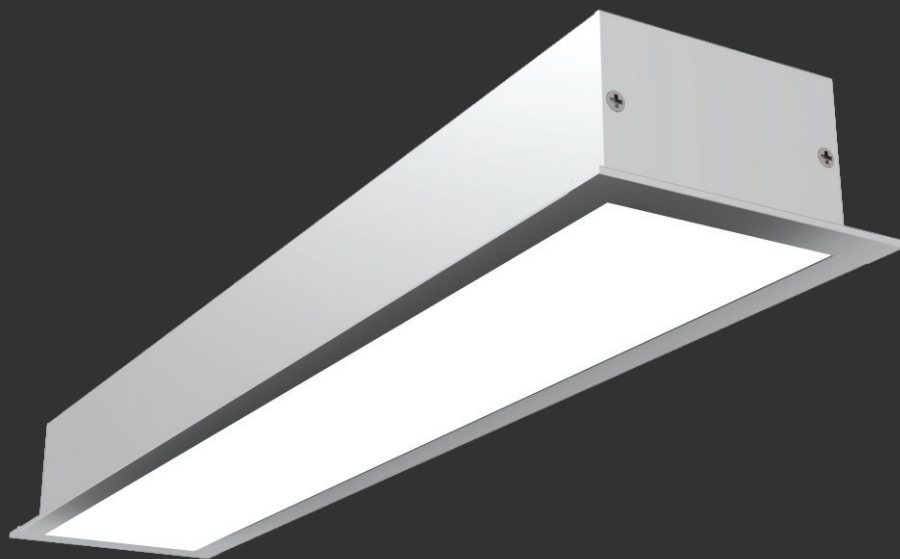


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 52mm • Width : 65mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

C-Clamp




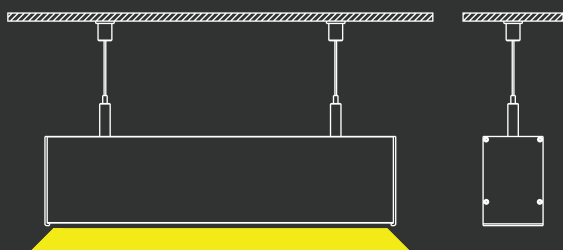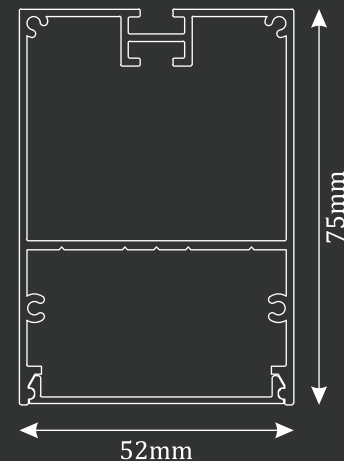


Body Color Available



White




Grey



Black

CCT



3000K



4000K



5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Suspended
Dimensions	: • Width : 52mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

Hanging




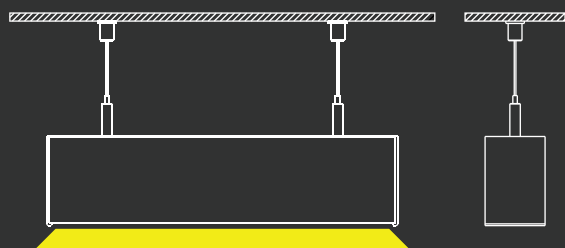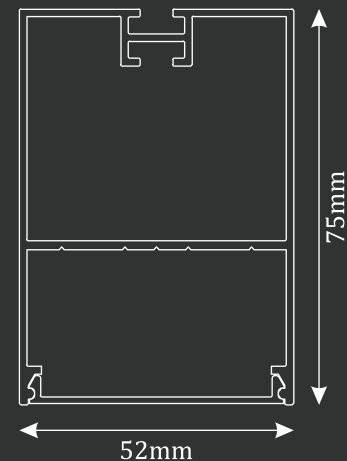


Body Color Available



White




Grey



Black

CCT



3000K



4000K




5700K

Technical Specification



Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Suspended
Dimensions	: • Width : 52mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories


Hanging




Prismatic Diffuser - UGR-19
(with film thickness 0.2mm)

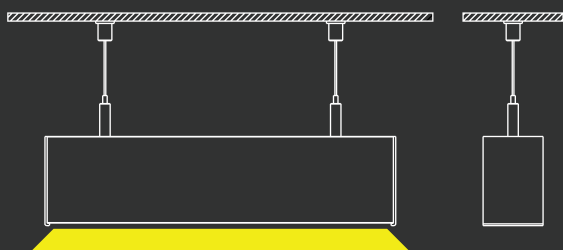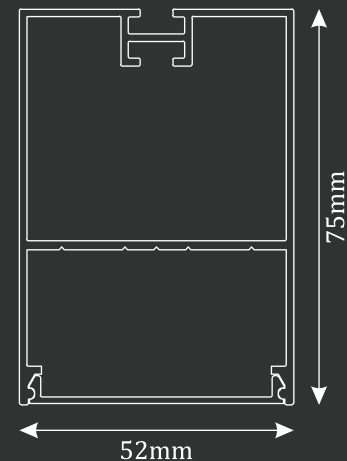


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K




Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Suspended
Dimensions	: • Width : 52mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

Hanging




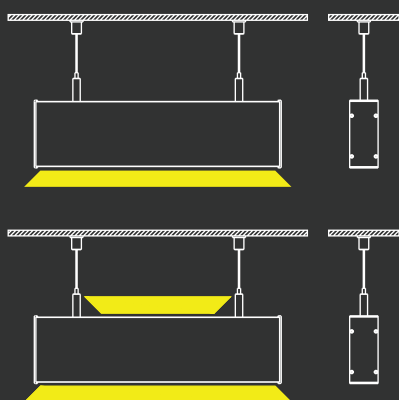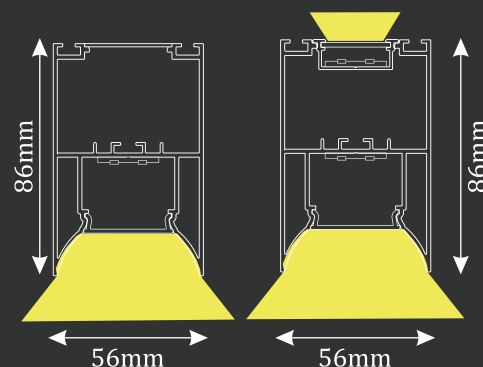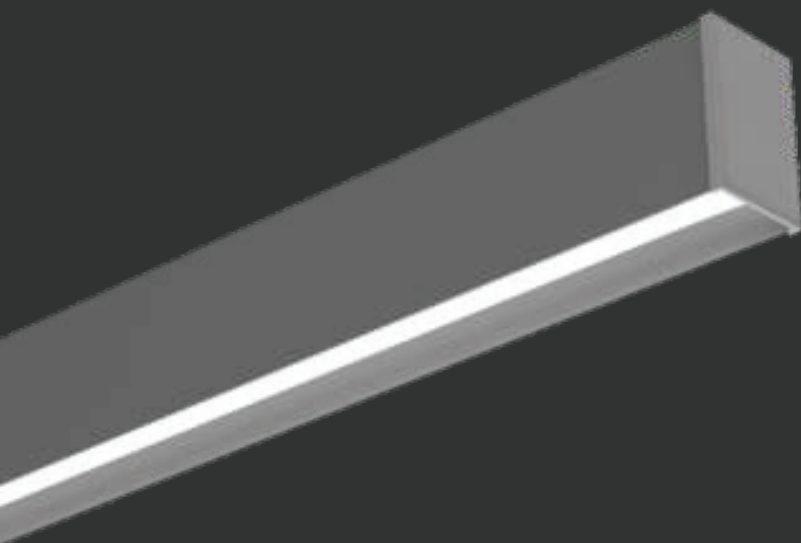


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 90 Lumens/Watt
Mounting Type	: (Suspended and Suspended updown)
Dimensions	: • Width : 56mm • Height : 86mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

Hanging







GLEAM SERIES

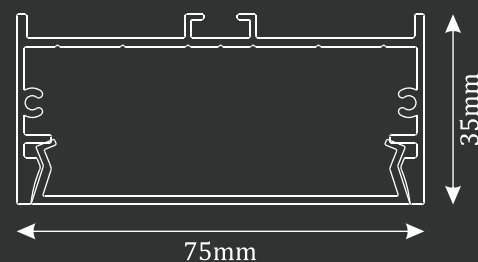


Body Color Available



White



Grey



Black

CCT



3000K






4000K




5700K

Technical Specification


Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Surface
Dimensions	: • Cutout : 75mm • Width : 75mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

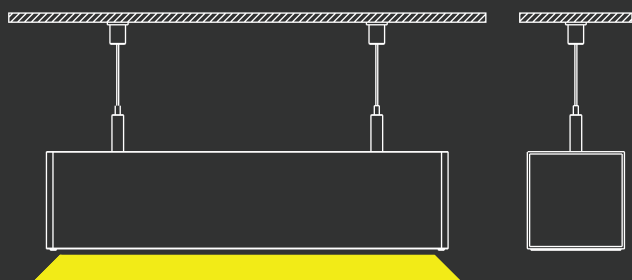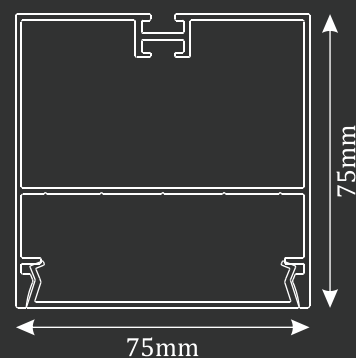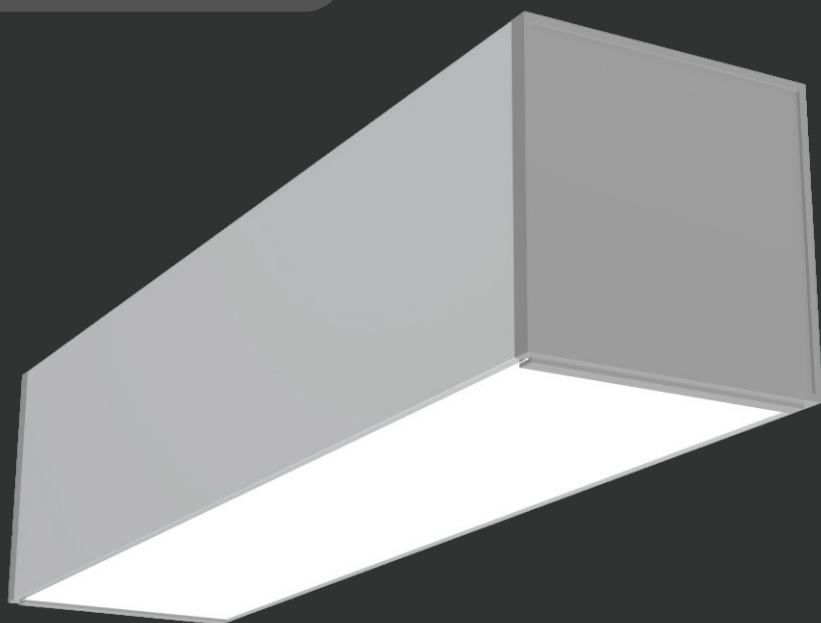


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K



Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Hanging
Dimensions	: • Width : 75mm • Height : 75mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

Hanging




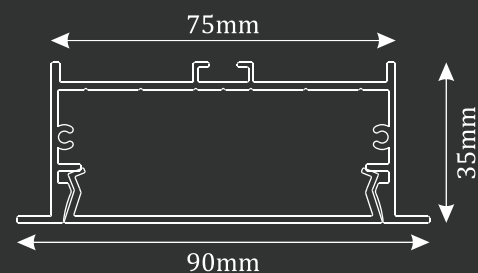


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed / Concealed
Dimensions	: • Cutout : 75mm • Width : 90mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

C-Clamp







DAZZLE SERIES

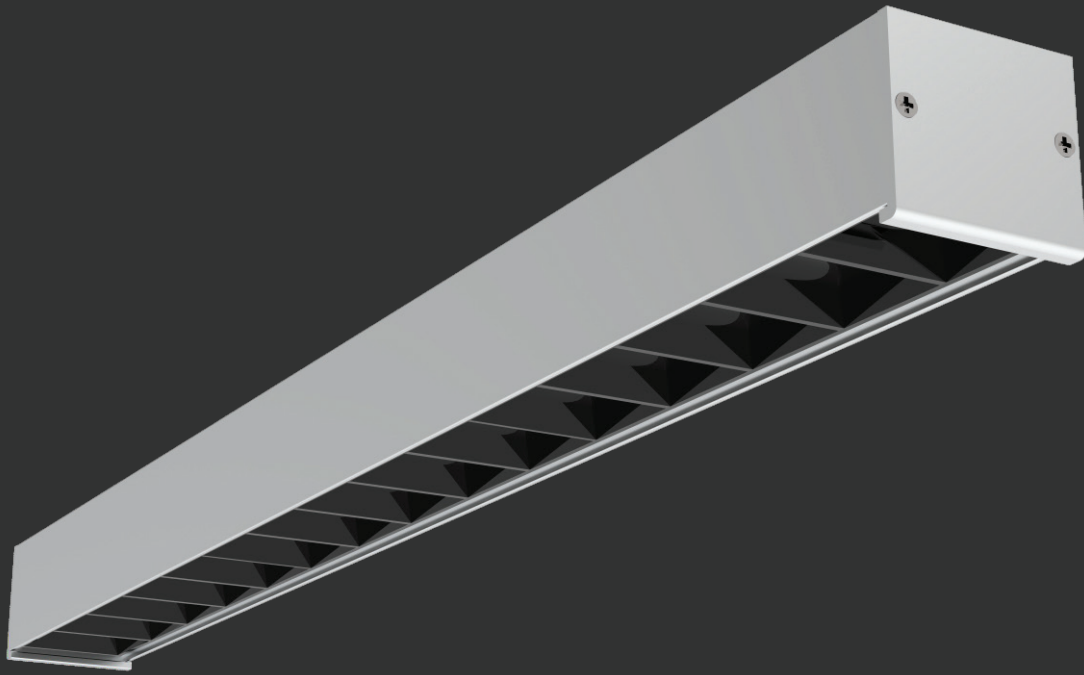


Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K





Technical Specification


Housing	: Aluminium Extrusion (Powder Coated)
LDA	: Black and Silver Reflector with Clear Lens (132mm)
Beam Angle	: 45°
LED	: Osram Oslon Square 3030
Driver	: Osram / Fulham - 36V DC
Wattage	: 10w/LDA
Lumens	: 70 lumens/Watt
Mounting Type	: Surface
Dimensions	: • Cutout : 35mm • Width : 35mm • Height : 30mm
Option Available	: • Customize length and formation • Dimmable Dali & Analogue • Constant current led and driver

DZL-3530




NISYA
Live The Miracle

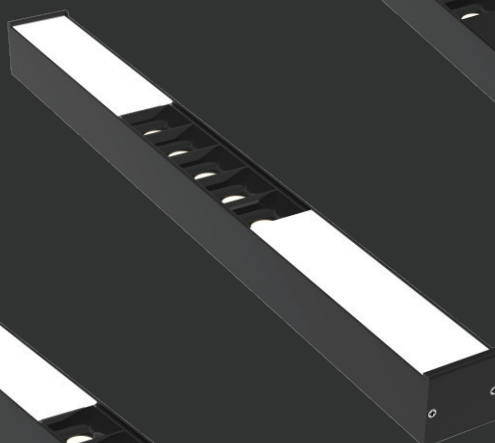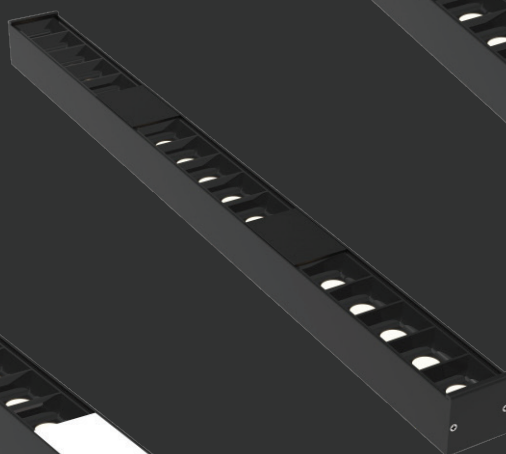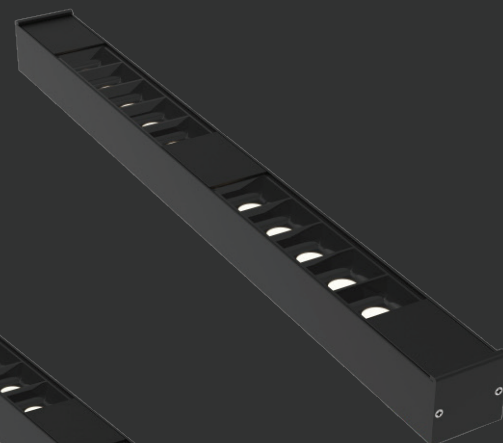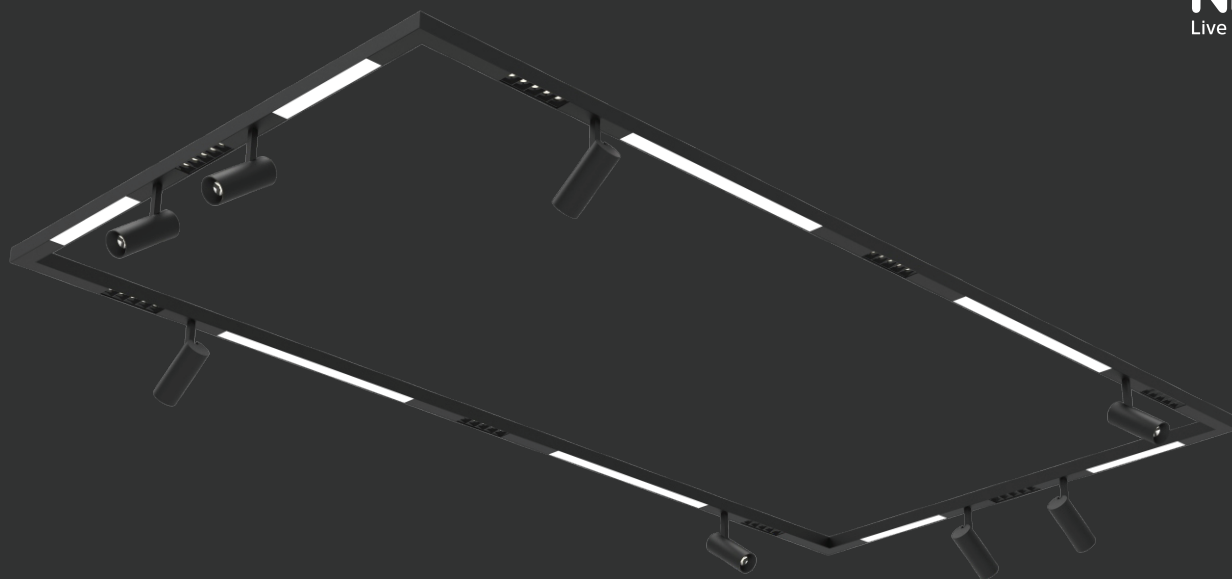


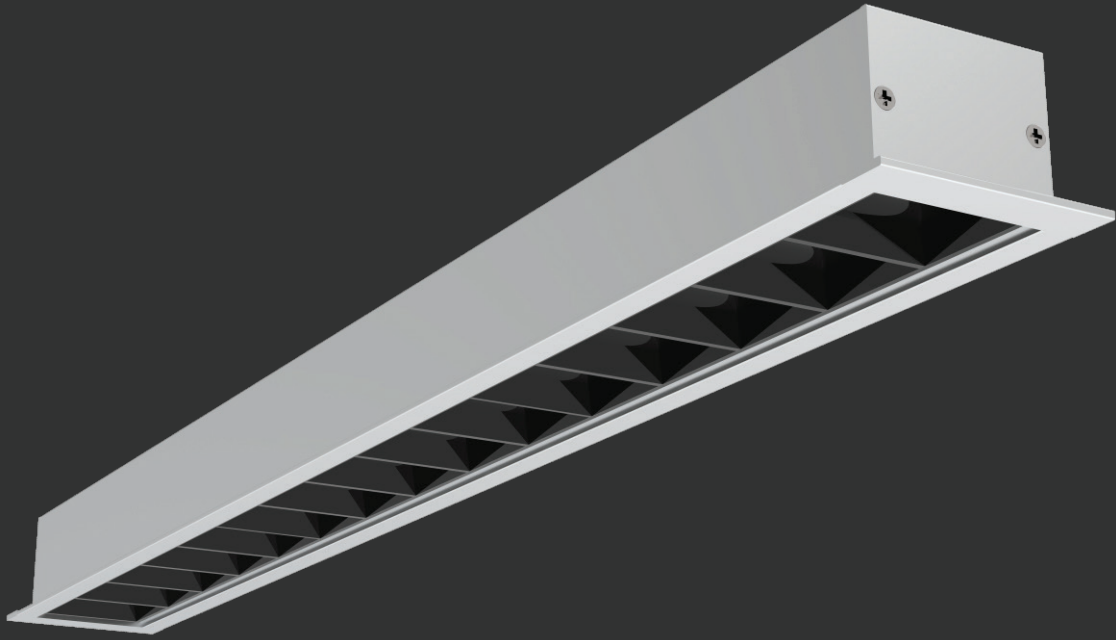


Body Color Available



White



Grey



Black

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
LDA	: Black and Silver Reflector with Clear Lens (132mm)
Beam Angle	: 45°
LED	: Osram Oslon Square 3030
Driver	: Osram / Fulham - 36V DC
Wattage	: 10w/LDA
Lumens	: 70 lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 35mm • Width : 45mm • Height : 30mm
Option Available	: • Customize length and formation • Dimmable Dali & Analogue • Constant current led and driver

Accessories



Recessed


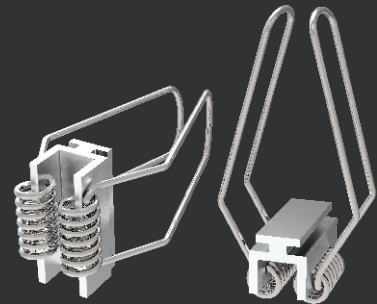


DZL-4530




NISYA
Live The Miracle

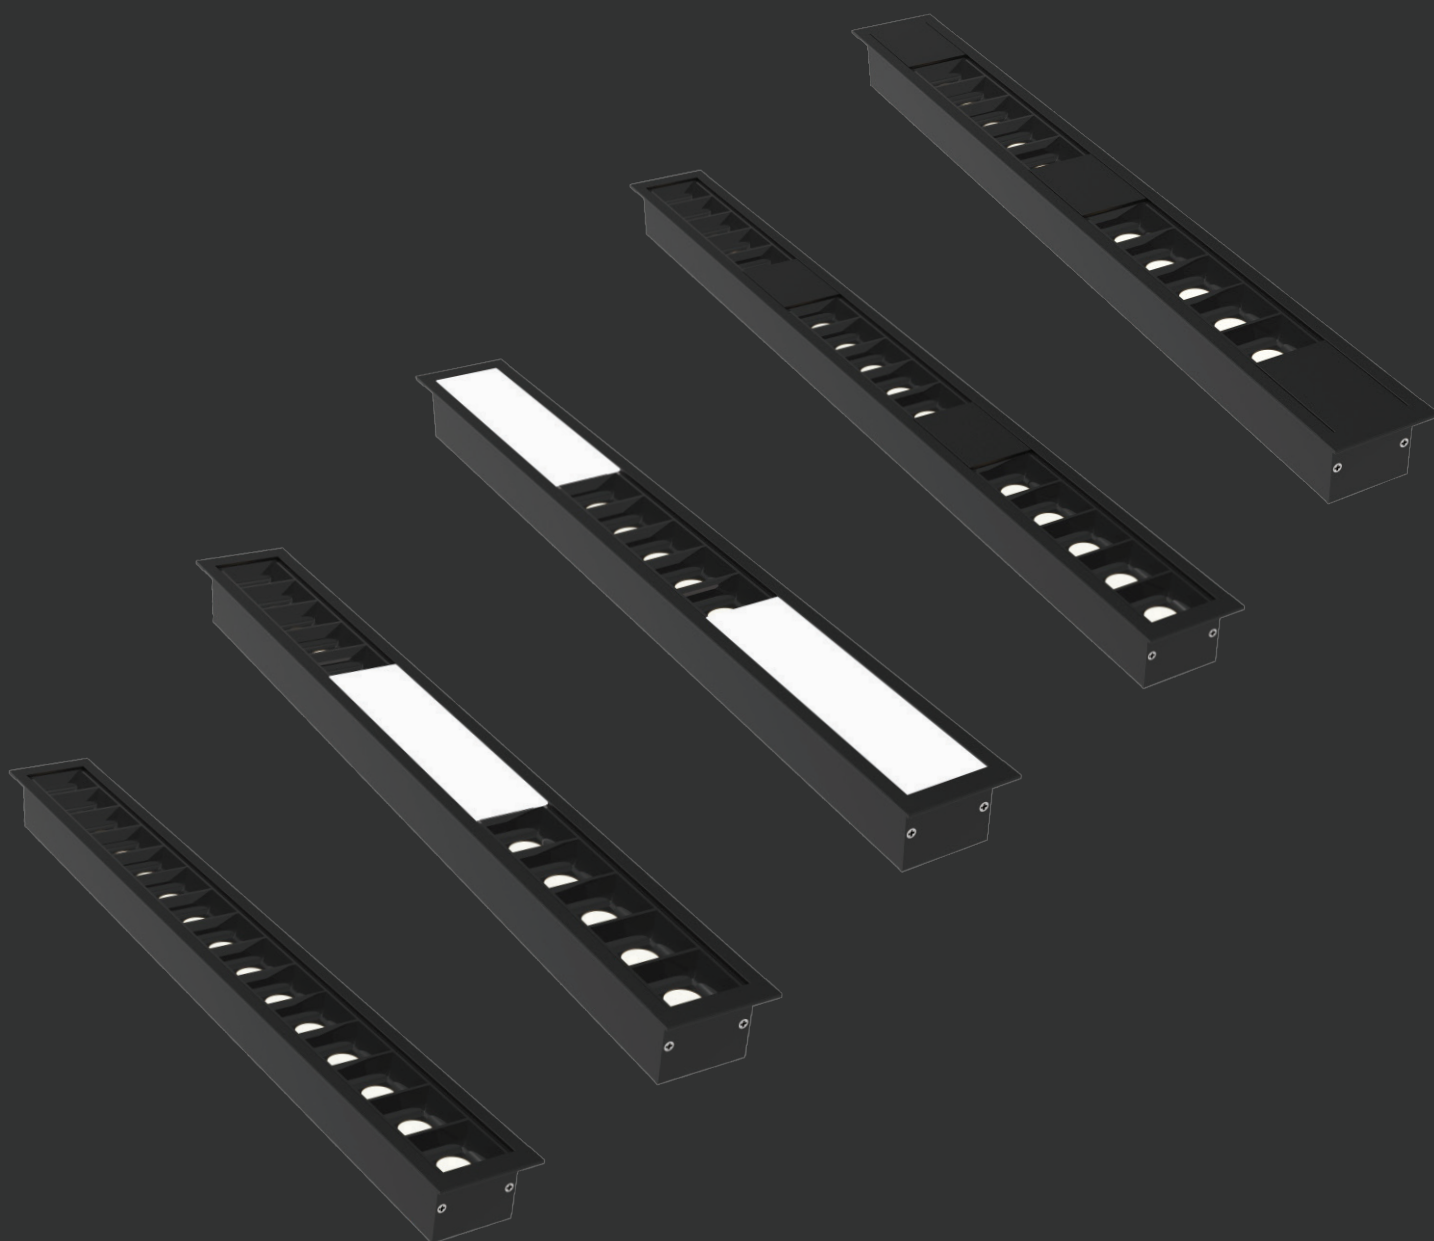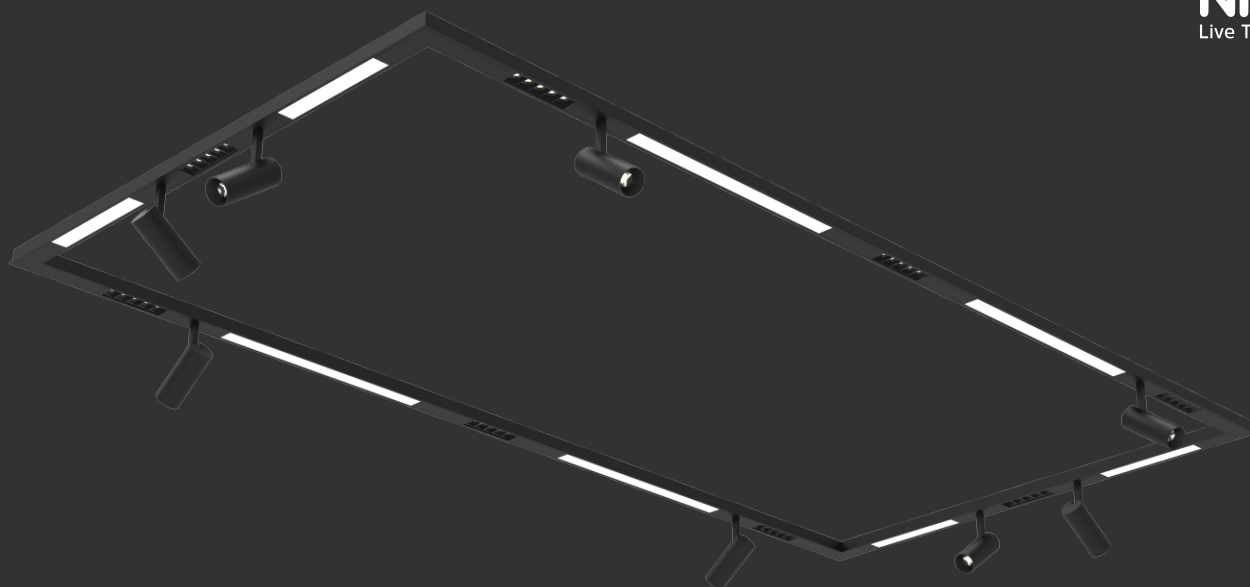


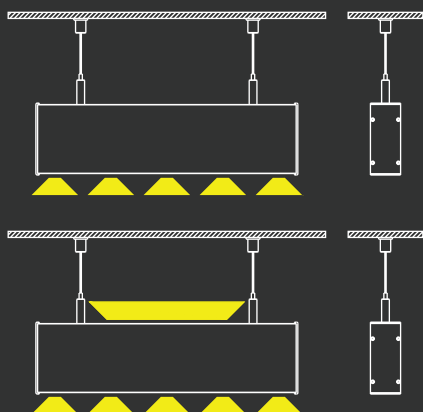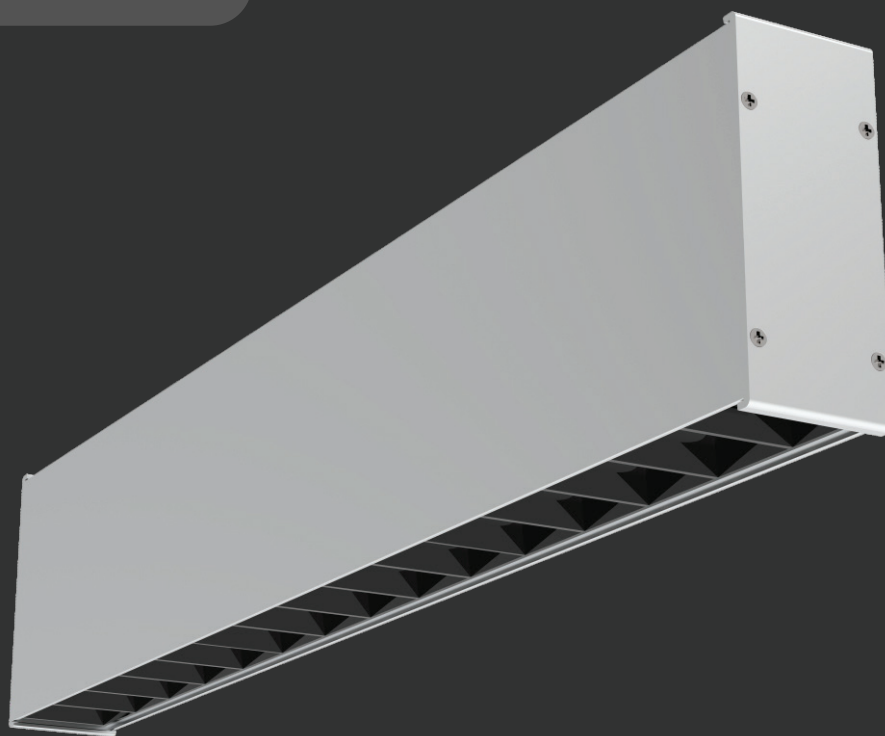

Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
LDA	: Black and Silver Reflector with Clear Lens (132mm)
Beam Angle	: 45°
LED	: Osram Oslon Square 3030
Driver	: Osram / Fulham - 36V DC
Wattage	: 10w/LDA
Lumens	: 70 lumens/Watt
Mounting Type	: Suspended and Suspended updown
Dimensions	: • Width : 35mm • Height : 80mm
Option Available	: • Customize length and formation • Dimmable Dali & Analogue • Constant current led and driver

Accessories



Hanging



DZL-3580





NISYA
Live The Miracle

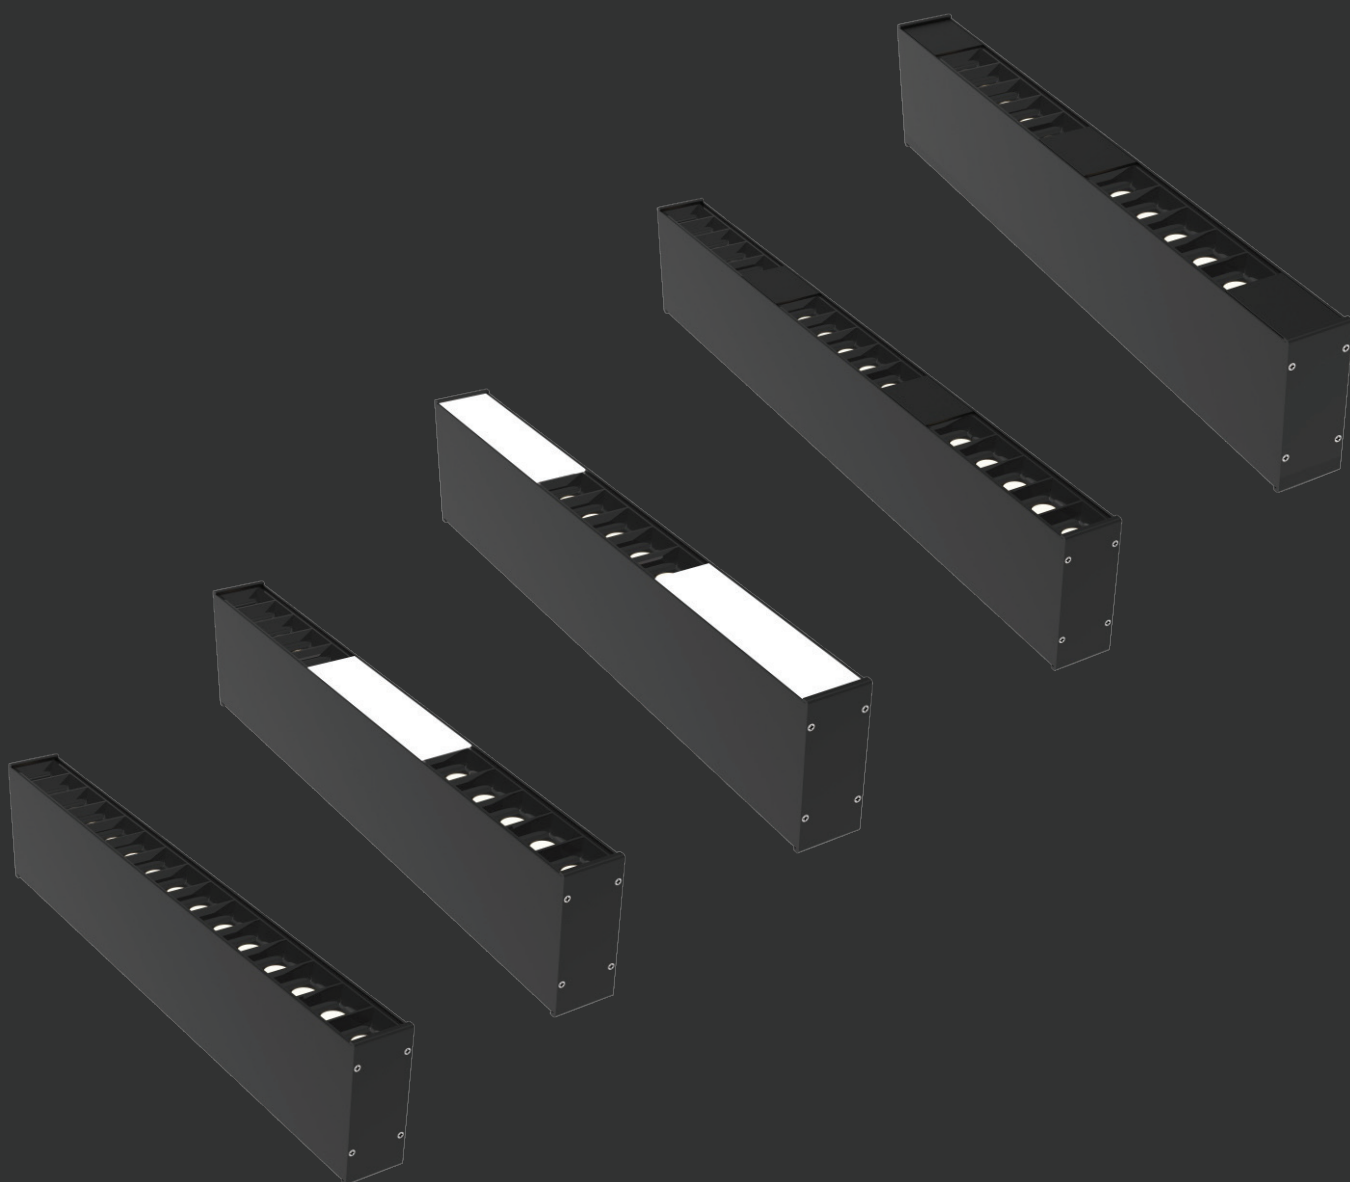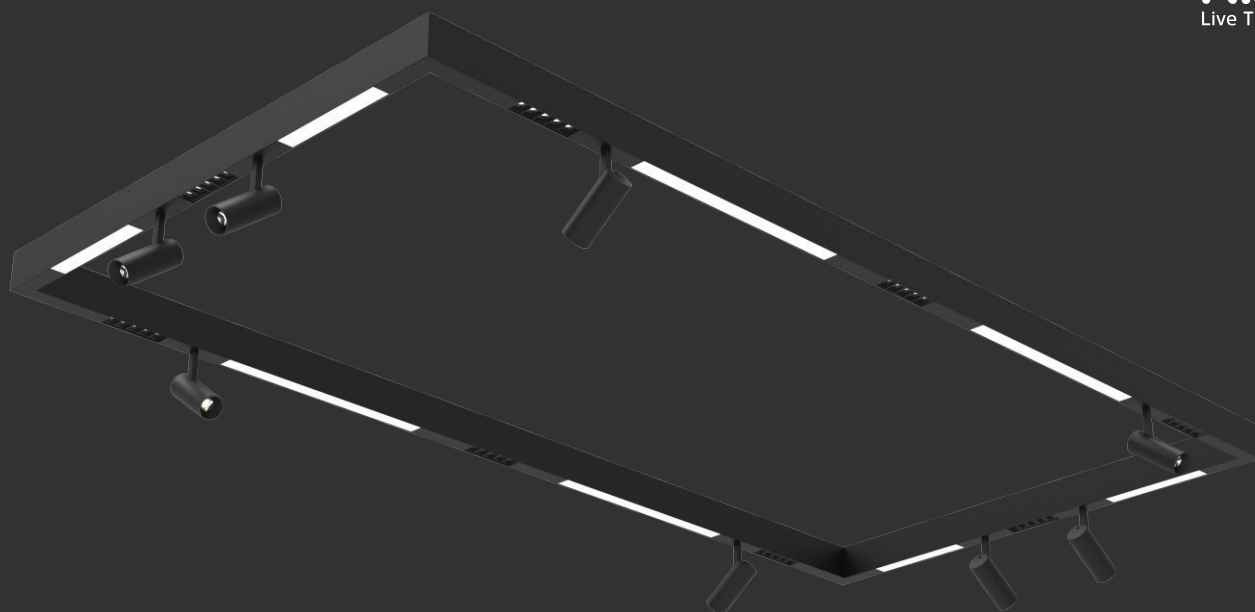





WELKIN SERIES

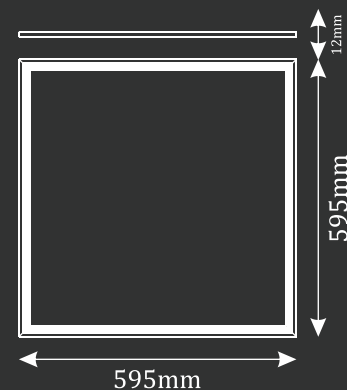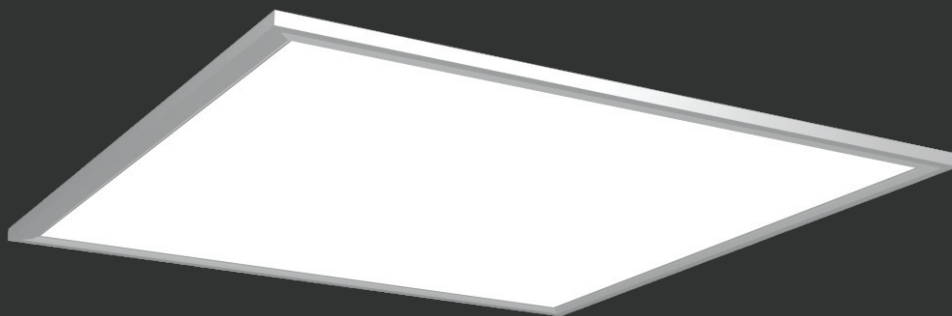


Body Color Available



White



Grey



Black

CCT



3000K






4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 40W
Lumens	: 100 Lumens/Watt
Mounting Type	: Ceiling Mounted
Dimensions	: • Length : 595mm • Width : 595mm • Height : 12mm
Option Available	: • Dimmable Dali & Analogue

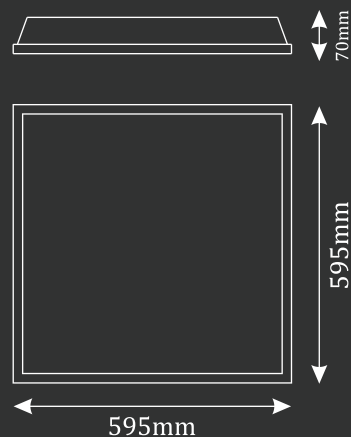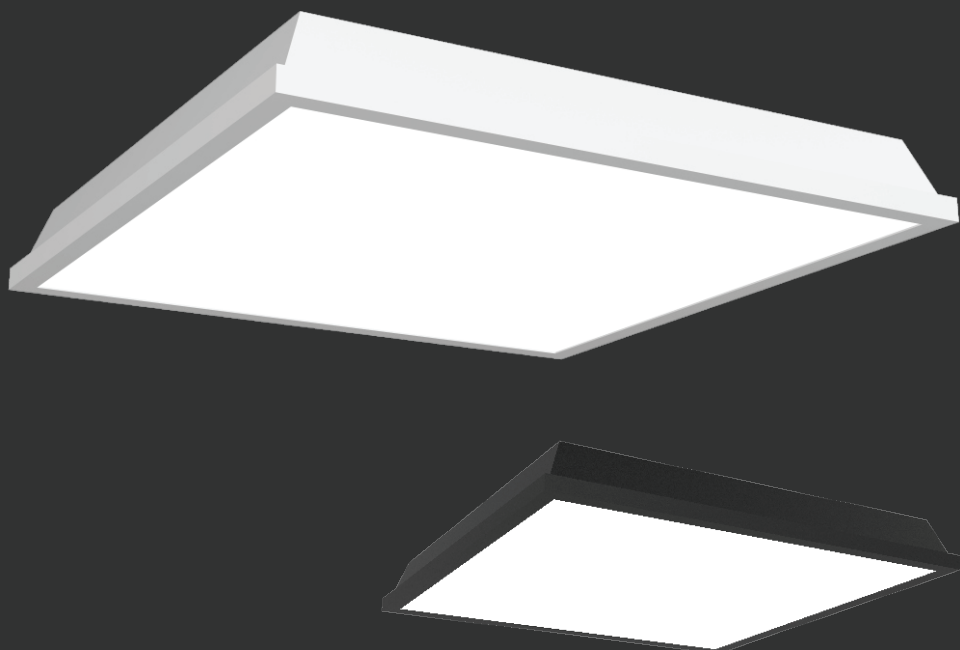

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Sheet Moulded (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 40W
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Length : 595mm • Width : 595mm • Height : 70mm
Option Available	: • Dimmable Dali & Analogue • Constant current led and driver



DANISH SERIES

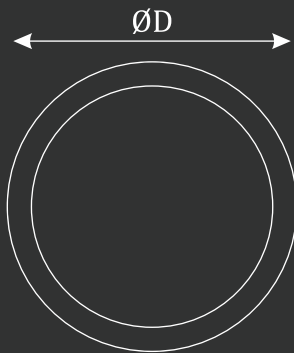

Body Color Available



White



Grey

CCT



3000K



4000K



5700K


Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 30W, 40W, 55W resp.
Lumens	: 80 Lumens/Watt
Dimensions	: • Cutout : 265mm 415mm 565mm • Dia : 300mm 450mm 600mm • Height : 70mm 70mm 70mm
Features	: • Available : • Hanging ☒ • Surface ☒
Option Available	: • Dimmable Dali & Analogue • Constant current led and driver


Accessories

Hanging



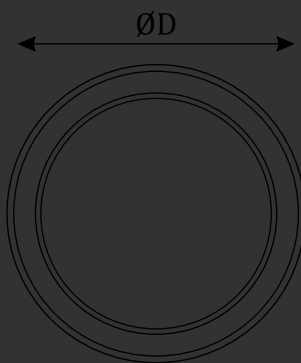

Body Color Available



White



Grey

CCT



3000K



4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 40W
Lumens	: 80 Lumens/Watt
Dimensions	: • Dia : 610mm • Light Window : 42mm • Cutout : 600mm • Height : 35mm 
Features	: • Available : • Recessed
Option Available	: • Dimmable Dali & Analogue • Constant current led and driver



NOVA SERIES

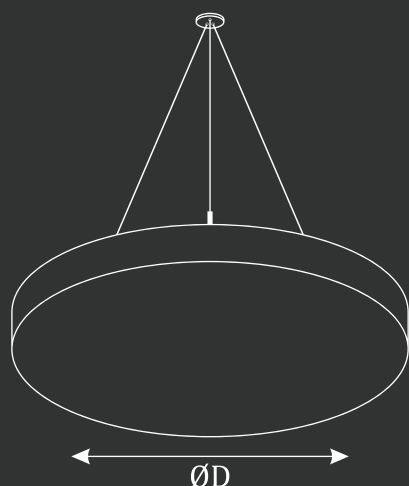

Body Color Available

Body Color Available



White



Grey

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 20W, 30W, 40W
Lumens	: 80 Lumens/Watt
Dimensions	: • Cutout : 265mm 415mm 565mm • Dia : 300mm 450mm 600mm • Height : 70mm 70mm 70mm
Features	: • Available : • Hanging ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

Accessories

Hanging






Body Color Available




White



Grey

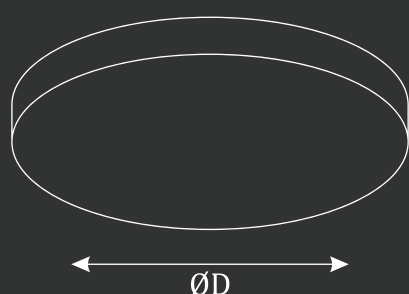

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 20W, 30W, 40W
Lumens	: 80 Lumens/Watt
Dimensions	: • Cutout : 265mm 415mm 565mm • Dia : 300mm 450mm 600mm • Height : 70mm 70mm 70mm
Features	: • Available : • Surface ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver




Body Color Available



White



Grey

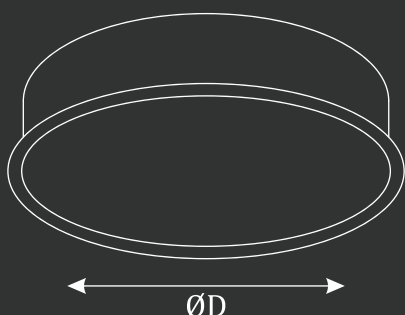

CCT



3000K



4000K



5700K

Technical Specification


Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 20W, 30W, 40W
Lumens	: 80 Lumens/Watt
Dimensions	: • Cutout : 265mm 415mm 565mm • Dia : 300mm 450mm 600mm • Height : 70mm 70mm 70mm
Features	: • Available : • Recessed ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver




SONSY SERIES




Body Color Available



White



Grey



Black

CCT



3000K



4000K




5700K




Technical Specification

Housing	: CRCA - Metal Housing Powder Coated
Diffuser	: ACRYLIC (Asthali Make)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 24V DC / 36V DC
Wattage	: 24w/meter
Lumens	: 70 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Width : 50mm • Height : 70mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

C-Clamp

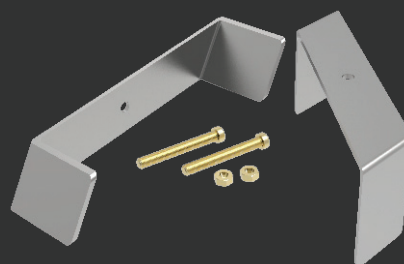


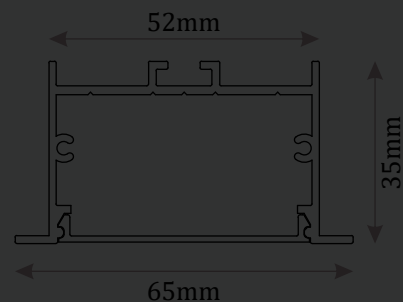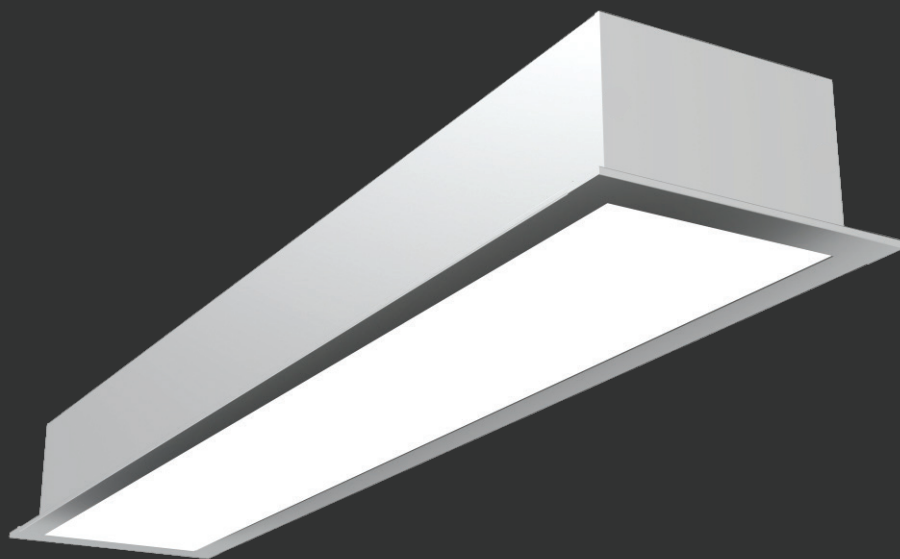

Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 100 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 52mm • Width : 65mm • Height : 35mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver


Accessories

C-Clamp







Body Color Available



White



Grey



Black

CCT



3000K



4000K



5700K

Technical Specification

Housing	: CRCA - Metal Housing
Diffuser	: ACRYLIC (Asthali Make)
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 24w/meter
Lumens	: 70 Lumens/Watt
Mounting Type	: Recessed
Dimensions	: • Cutout : 75mm (Without Trim) • Width : 75mm • Height : 50mm
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver




Accessories

C-Clamp






CUSTOMISED LINEARS

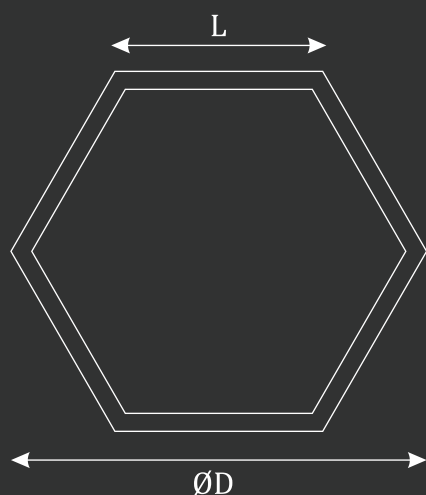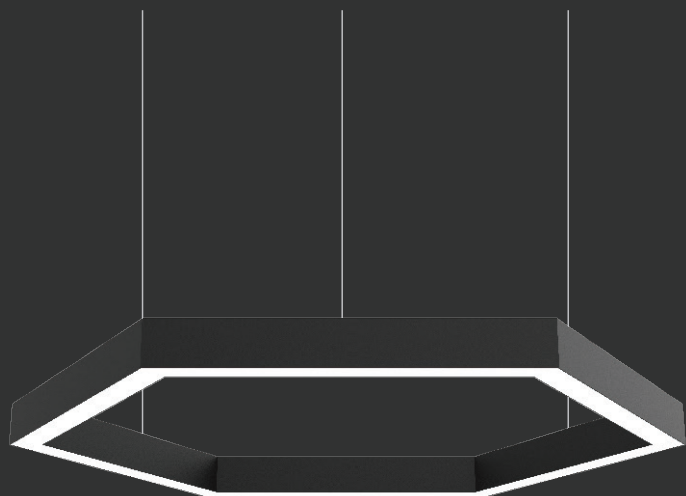

Recessed



Surface

CCT



3000K






4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

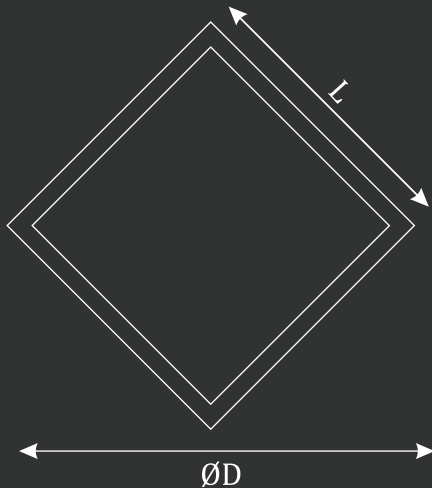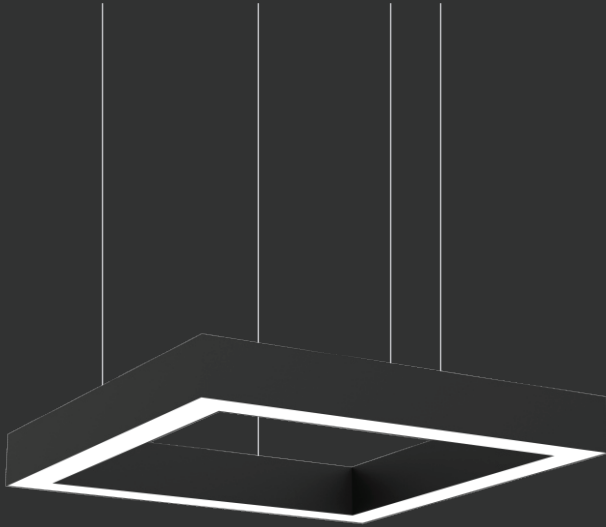

Recessed



Surface

CCT

3000K





4000K




5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

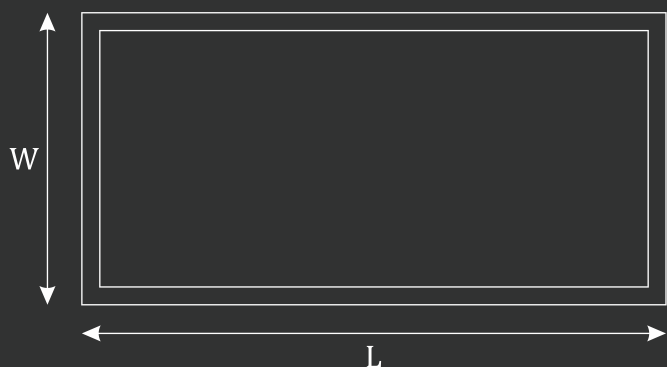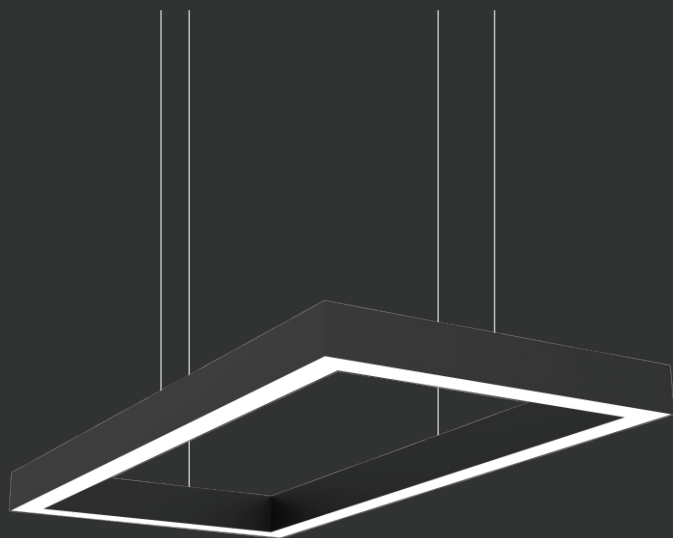

Recessed



Surface

CCT



3000K







4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

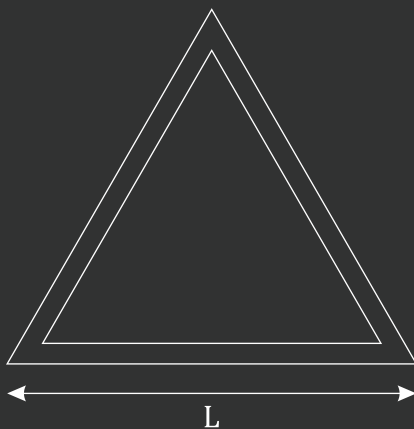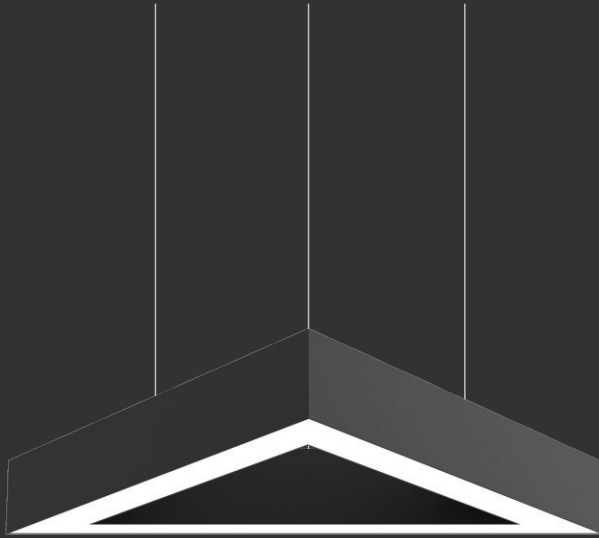

CCT



3000K





4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver

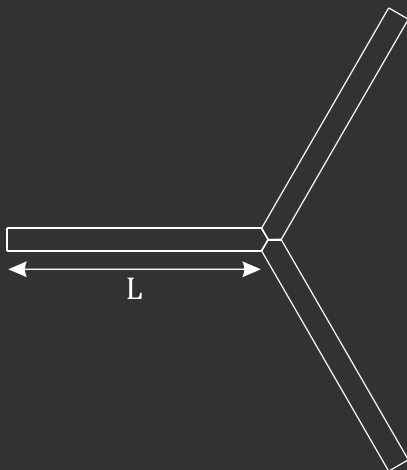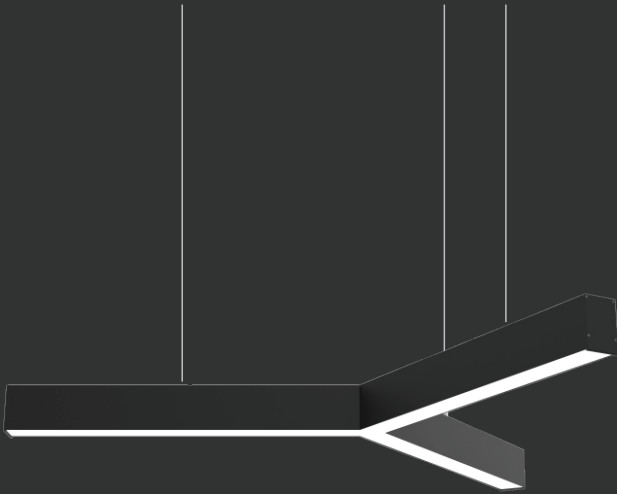

Recessed



Surface

CCT

3000K



4000K



5700K

Technical Specification

Housing	: Aluminium Extrusion (Powder Coated)
Diffuser	: PMMA
LED	: Bridgelux 2835 SMD
Driver	: Osram / Fulham - 36V DC
Wattage	: 15w/meter
Lumens	: 80 Lumens/Watt
Features	: • Available : • Hanging ☒ • Surface ☒ • Recessed ☒ • 35 Series ☒ • 52 Series ☒ • 75 Series ☒
Option Available	: • Customize length • Dimmable Dali & Analogue • Constant current led and driver



NISYA ELECTRICALS INDIA PVT. LTD.

**Nirman Industrial Esatate, New Link Rd,
Malad West, Mumbai, Maharashtra- 400064**

www.nisya.in | Helpline No.: +91 89762 26084

For any customer support query please email to support@nisya.in